




FDV SPEC SHEET

Z Line Louvre

Art. no: 101240-E-02-3



Lighting Solutions

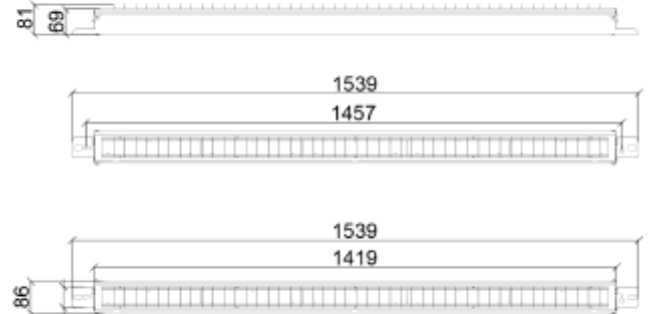

Z Line Louvre



Art. no: 101240-E-02-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 6470 |
| Lumen LED (tc=25): | 8500 |
| Beam Angle: | 110° |
| CCT (Color Temperature): | 2700 |
| CRI / Ra: | 80 |
| Color Code: | 827 |
| Lens (Diffuser): | Crossblade |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | None |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 46 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 16 |
| Max load pr circuit - B16: | 26 |
| Max load pr circuit - C10: | 27 |
| Max load pr circuit - C16: | 43 |
| Leakage current [mA]: | 0,5 |
| Inrush current I _{max} [A]: | 41 |
| Inrush current time [µs]: | 124 |
| Current Output [mA]: | 350 |

MOUNTING / CONNECTION

| | |
|-------------|-----------------------|
| Connection: | 1815 Quick connection |
| Mounting: | Surface, Ceiling |



FDV SPEC SHEET

Z Line Louvre

Art. no: 101240-E-02-3



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP20 |
| Operating Temperature [°C]: | 0 - 25 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| RAL: | RAL9016 |
| Length [mm]: | 1539 |
| Height [mm]: | 86 |
| Width [mm]: | 92 |
| Weight [kg]: | 4,5 |
| Housing Material : | Aluminium |