





FDV SPEC SHEET

Benu Slim Office Pullswitch-Base

Art. no: 102521-140-2



Lighting Solutions

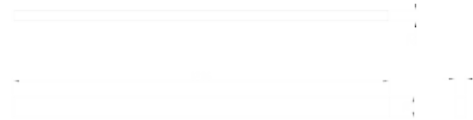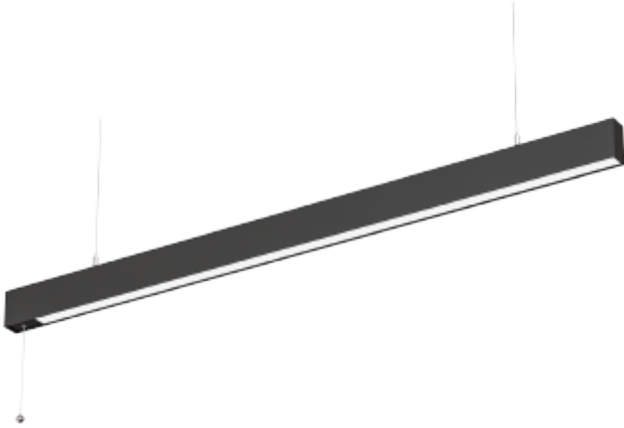

Benu Slim Office Pullswitch-Base



Art. no: 102521-140-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7100
Lumen LED (tc=25):	7800
Beam Angle:	140° / 90°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Mounting:	Suspended, Ceiling, Pendant

ELECTRICAL DATA

Dimming:	Pull Dim
Flickerfree:	Yes
System Power [W]:	50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Socket / Cap-Base:	N/A
Current Output [mA]:	60



FDV SPEC SHEET

Benu Slim Office Pullswitch-Base

Art. no: 102521-140-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Length [mm]:	1200
Height [mm]:	70
Width [mm]:	35
Weight [kg]:	1,65
Housing Material :	Aluminium