




## FDV SPEC SHEET

Tania Mini 1-Circuit

Art. no: 3553-3-36-3



Lighting Solutions

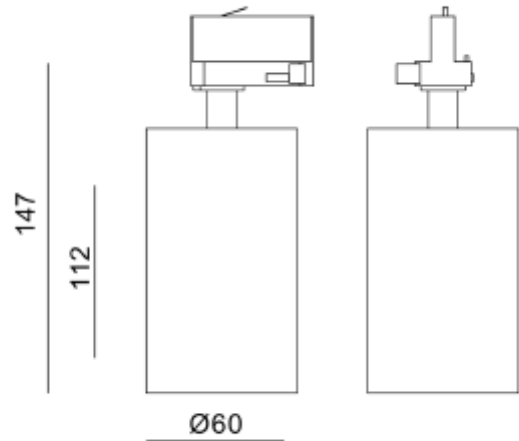

# Tania Mini 1-Circuit



Art. no: 3553-3-36-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1050
Lumen LED (tc=25):	1450
Beam Angle:	36°
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Track 1-Circuit
Mounting:	Track, Ceiling

### ELECTRICAL DATA

Dimming:	Phase-Cut
System Power [W]:	14,5
System Voltage [V]:	230V 50Hz
Dimming Phasecut Type:	Leading / Trailing edge
Protection Class:	1
Max load pr circuit - B10:	125
Max load pr circuit - B16:	200
Max load pr circuit - C10:	125
Max load pr circuit - C16:	200
Inrush current I <sub>max</sub> [A]:	5
Inrush current time [µs]:	100
Current Output [mA]:	350
Dimming Phasecut Type:	Leading / Trailing edge



## FDV SPEC SHEET

Tania Mini 1-Circuit

Art. no: 3553-3-36-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 55 000
Color:	White
Length [mm]:	147
Width [mm]:	60
Housing Material :	Aluminium
Housing Material :	Aluminium