




## FDV SPEC SHEET

Joule

Art. no: 102012-03-1



Lighting Solutions

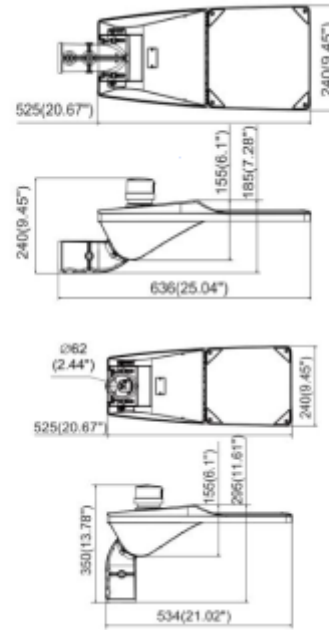

# Joule



Art. no: 102012-03-1

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	10920
Lumen LED (tc=25):	12000
Beam Angle:	P3 Assymetric
CCT (Color Temperature):	4000
CRI / Ra:	70
Color Code:	740
MacAdam (SDCM):	5

### MOUNTING / CONNECTION

Connection:	Cable 5m
Mounting:	Wall, Mast

### ELECTRICAL DATA

Dimming:	None
Flicker metric (Pst LM) <:	0
Stroboscopic effect metric (SVM) <	0
System Power [W]:	70
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	3
Max load pr circuit - B16:	6
Max load pr circuit - C10:	9
Max load pr circuit - C16:	15
Leakage current [mA]:	0,7
Inrush current Imax [A]:	54
Inrush current time [µs]:	180
Current Output [mA]:	60
Voltage Forward Min [V]:	5,34
Voltage Forward Max [V]:	5,4



## FDV SPEC SHEET

Joule

Art. no: 102012-03-1



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP66
Impact Protection:	IK09
Corrosion Class:	C4
Wind force (EPA) [m2] at 0°:	0,15
Surge Protection:	L/N-PE = 10KV, L-N = 5KV
Operating Temperature [°C]:	-30 - 50
Lifetime [h]:	L80B10: 100 000
Color:	Grey
RAL:	RAL7022
Length [mm]:	615
Height [mm]:	225
Width [mm]:	350
Weight [kg]:	6
Housing Material :	Aluminium