



PRODUCT SHEET


Silindir 60

Art. no: 1014060-20-2-p

NORLUX®

Lighting Solutions


Silindir 60

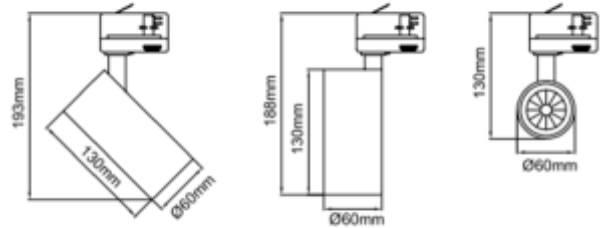

A++

SPECIFICATIONS

| | |
|--------------------------|------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 15W |
| CCT (Color Temperature): | 2700K |
| CRI / Ra: | 90 |
| Lumen Output: | 1411lm |
| Lumen LED (tc=25): | 1350lm |
| Beam Angle: | 20° |
| Lens (Diffuser): | Clear |
| Dimming: | Phase-Cut |
| System Voltage [V]: | 230V 50Hz |
| Connection: | Track 3-Circuit |
| Mounting: | Track |
| Lifetime [h]: | L80B10: 100 000h |
| MacAdam (SDCM): | 3 |
| Color: | Black |
| Length [mm]: | 188mm |
| Width [mm]: | 60mm |

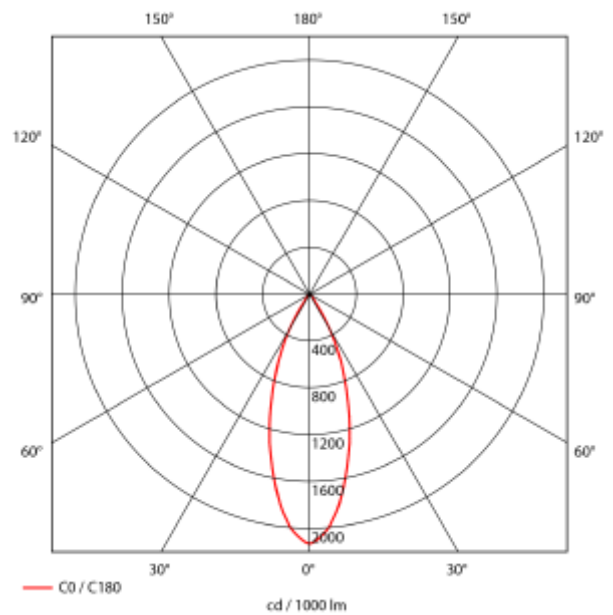

Silindir 60 is a modern and flexible spotlight with high efficiency and high CRI. The driver is built inside the lamp and you can tilt the spotlight 90° and rotate 350°.