




## FDV SPEC SHEET

Plaza Up&Down 900lm 830 15°-210° 10W BK  
Art. no: 101510-2



Lighting Solutions

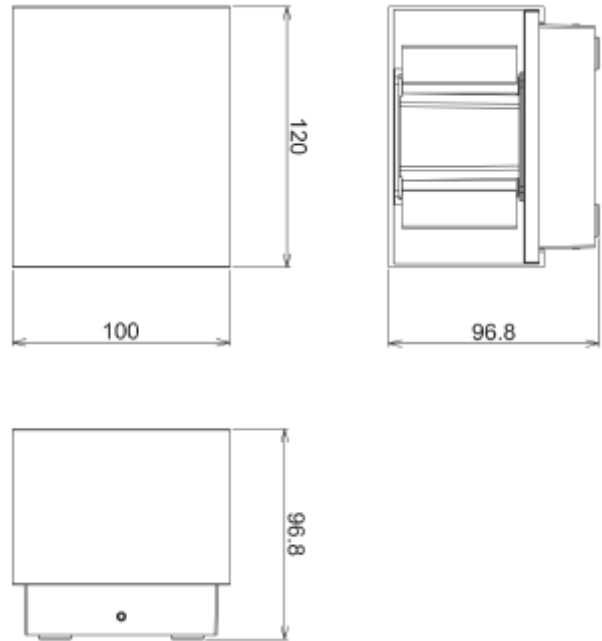

# Plaza Up&Down 900lm 830 15°-210° 10W BK



Art. no: 101510-2

### LIGHT TECHNICAL

Lumen Output:	830
Lumen LED (tc=25):	900
Beam Angle:	15°-210°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Wall

### ELECTRICAL DATA

Dimming:	None
System Power [W]:	10
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	111
Max load pr circuit - B16:	178
Max load pr circuit - C10:	111
Max load pr circuit - C16:	178
Leakage current [mA]:	0,75
Inrush current I <sub>max</sub> [A]:	5,76
Inrush current time [μs]:	110
Socket / Cap-Base:	N/A
Current Output [mA]:	140



## FDV SPEC SHEET

Plaza Up&Down 900lm 830 15°-210°° 10W BK

Art. no: 101510-2



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK06
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Length [mm]:	120
Height [mm]:	100
Width [mm]:	96,8
Weight [kg]:	0,6
Housing Material :	Aluminium