




**FDV SPEC SHEET**  
Tania Mini Slim Surface  
Art. no: 101931-36-2-p



# Tania Mini Slim Surface

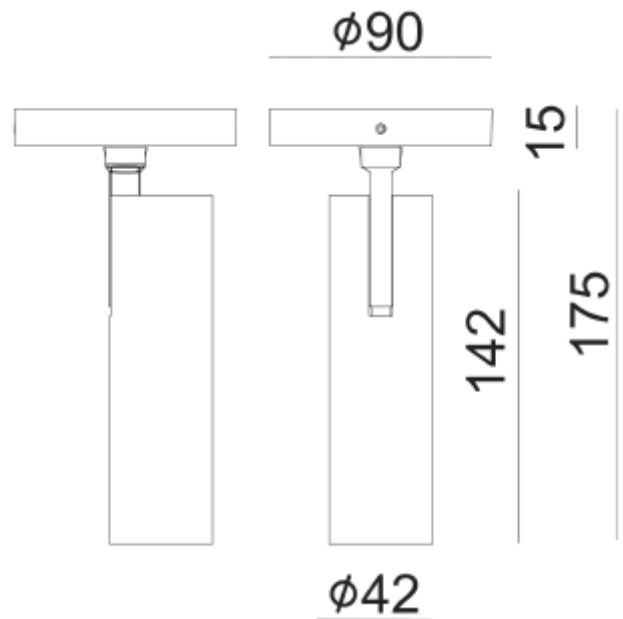

Art. no: 101931-36-2-p

| LIGHT TECHNICAL          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 740            |
| Lumen LED (tc=25):       | 850            |
| Beam Angle:              | 36°            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 90             |
| Color Code:              | 930            |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Clear          |

| MOUNTING / CONNECTION |                  |
|-----------------------|------------------|
| Connection:           | Terminal         |
| Mounting:             | Surface, Ceiling |

| ELECTRICAL DATA                      |               |
|--------------------------------------|---------------|
| Dimming:                             | Phase-Cut     |
| Flicker metric (Pst LM) <:           | 1             |
| Stroboscopic effect metric (SVM) <   | 0,4           |
| System Power [W]:                    | 9             |
| System Voltage [V]:                  | 230V 50Hz     |
| Dimming Phasecut Type:               | Trailing edge |
| Protection Class:                    | 1             |
| Max load pr circuit - B10:           | 125           |
| Max load pr circuit - B16:           | 200           |
| Max load pr circuit - C10:           | 125           |
| Max load pr circuit - C16:           | 200           |
| Inrush current I <sub>max</sub> [A]: | 5             |
| Inrush current time [µs]:            | 100           |
| Voltage Forward Min [V]:             | 32,3          |
| Voltage Forward Max [V]:             | 38,1          |



## FDV SPEC SHEET

Tania Mini Slim Surface

Art. no: 101931-36-2-p



*Lighting Solutions*

### PRODUCT

|                             |                 |
|-----------------------------|-----------------|
| Ingress Protection:         | IP20            |
| Operating Temperature [°C]: | -20 - 40        |
| Lifetime [h]:               | L80B10: 100 000 |
| Color:                      | Black           |
| RAL:                        | RAL9005         |
| Height [mm]:                | 142             |
| Diameter [mm]:              | 42              |