



PRODUCT SHEET


Icarus 500lm 927 36° 7W WH phasecut Isosafe 8-pack

Art. no: 101975-36-3

NORLUX®


Lighting Solutions

Icarus 500lm 927 36° 7W WH phasecut Isosafe 8-pack

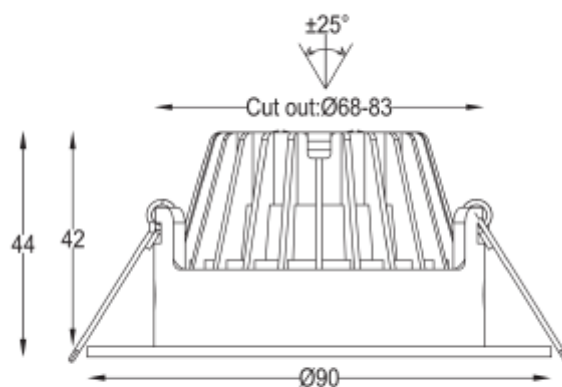

SPECIFICATIONS

| | |
|-------------------------------|-----------------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 7W |
| CCT (Color Temperature): | 2700K |
| CRI / Ra: | 95 |
| Lumen Output: | 456lm |
| Lumen LED (tc=25): | 500lm |
| Beam Angle: | 36° |
| Lens (Diffuser): | Clear |
| Dimming: | Phase-Cut |
| Flickerfree: | Yes |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Ceiling |
| Cut-out [mm]: | Ø68-83mm |
| Lifetime [h]: | L80B10: 100 000h |
| Lumen/W: | 62lm/W |
| UGR (<=): | 22 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 44mm |
| Diameter [mm]: | 90mm |
| Weight [kg]: | 0,3kg |
| To be recessed in insulation: | Yes, recessed in insulation |

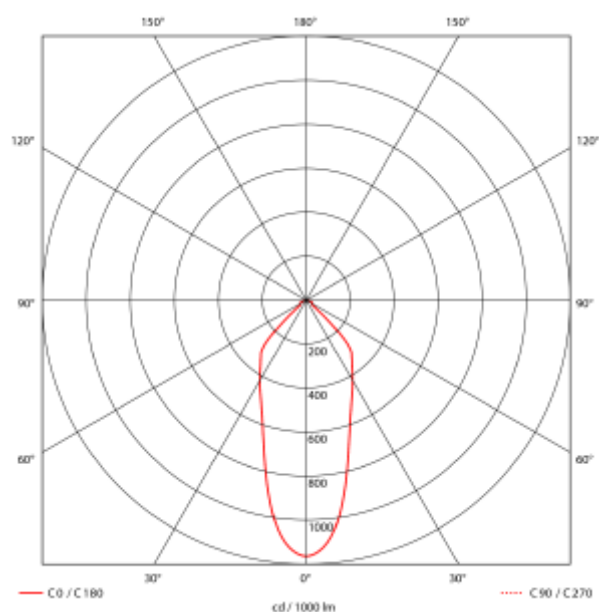

7W downlight that can be installed directly into insulation. Cutout Ø68-83mm makes it perfect for rehab and new installation. Tilttable 25°, CRI>95 and flickerfree phasecut driver. 8-pack with driver for each downlighth.