



PRODUCT SHEET

Trimo


Art. no: 18045-7-60-3-ddd

NORLUX®

Lighting Solutions

Trimo

155mm

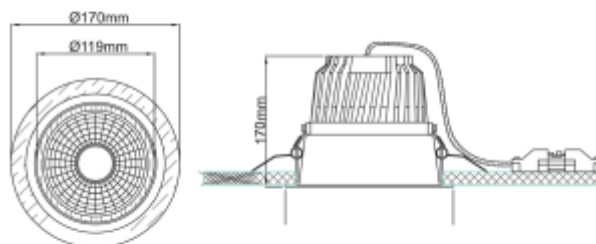

Tired of downlights giving obtrusive annoying stray light? Our Trimo range of downlights guarantees a minimum of stray light, this is accomplished by using a recessed LED light source. The Trimo range has a 18i3 connector and can be supplied with a variety of connector solutions.



SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	31W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	3580lm
Lumen LED (tc=25):	4750lm
Beam Angle:	60°
Lens (Diffuser):	Clear
Dimming:	DALI
System Voltage [V]:	230V 50Hz
Connection:	18i5 DALI Quick connection
Mounting:	Recessed, Ceiling
Cut-out [mm]:	Ø155mm
Lifetime [h]:	L80B10: 60 000h
Lumen/W:	116lm/W
MacAdam (SDCM):	3
Color:	White
Length [mm]:	170mm
Height [mm]:	170mm
Width [mm]:	170mm
Weight [kg]:	1,4kg
To be recessed in insulation:	No