




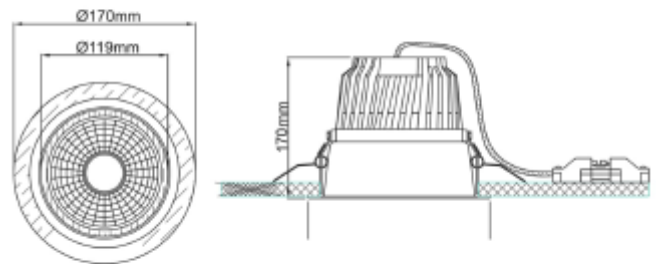
## FDV SPEC SHEET

Trimo

Art. no: 18045-7-60-3-ddd



 155mm



# Trimo



Art. no: 18045-7-60-3-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3580
Lumen LED (tc=25):	4750
Beam Angle:	60°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	18i5 DALI Quick connection
Cut-out [mm]:	Ø155
Mounting:	Recessed, Ceiling

### ELECTRICAL DATA

Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
Standby power P <sub>sb</sub> (W) <:	0,15
Flicker metric (P <sub>st</sub> LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	31
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	23
Max load pr circuit - C10:	23
Max load pr circuit - C16:	38
Leakage current [mA]:	0,16
Inrush current I <sub>max</sub> [A]:	23
Inrush current time [µs]:	200
Socket / Cap-Base:	N/A
Current Output [mA]:	800
Voltage Forward Min [V]:	29,6
Voltage Forward Max [V]:	39,5



## FDV SPEC SHEET

Trimo

Art. no: 18045-7-60-3-ddd



*Lighting Solutions*

### PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Lifetime [h]:	L80B10: 60 000
Color:	White
Length [mm]:	170
Height [mm]:	170
Width [mm]:	170
Weight [kg]:	1,4