



PRODUCT SHEET

Sargas Rotatable

Art. no: 29927-36-3


NORLUX®

Lighting Solutions

Sargas Rotatable




93mm

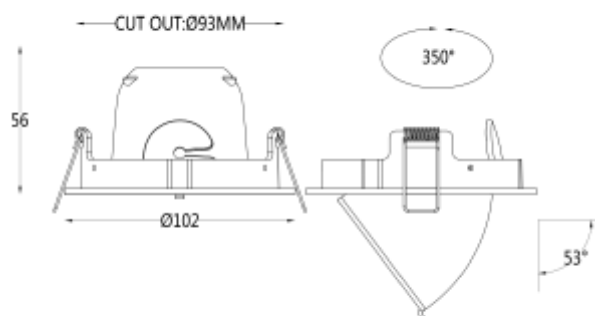

A+

SPECIFICATIONS

| | |
|-------------------------------|-------------------|
| System Power [W]: | 8W |
| CCT (Color Temperature): | 2700K |
| CRI / Ra: | 90 |
| Lumen LED (tc=25): | 600lm |
| Beam Angle: | 36° |
| Lens (Diffuser): | Clear |
| Dimming: | Phase-Cut |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | Ø93mm |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Height [mm]: | 56mm |
| Width [mm]: | 100mm |
| To be recessed in insulation: | No |

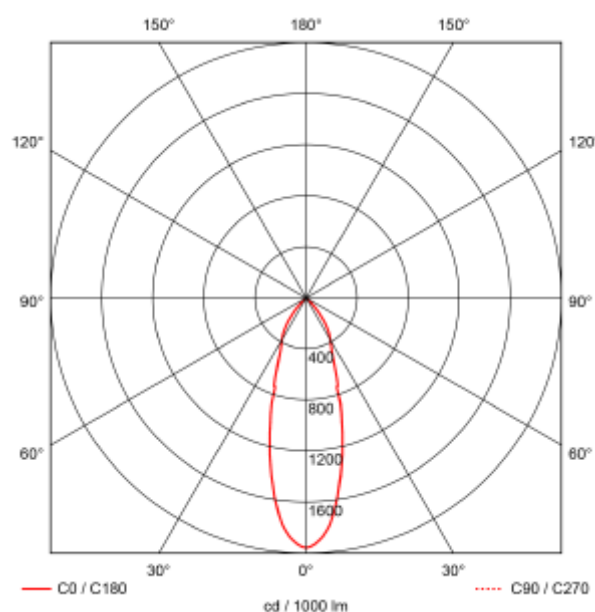

Sargas is an indoor downlight that can be tilted 53° and rotated 350° so you can point the light where you need it. This makes the downlight suitable for pitched roof, but also for flat ceilings to light up a wall, paintings or details you want to highlight. Comes with phase-cut driver with QuickConnect for easy installation. Cut-out Ø93mm.