




**FDV SPEC SHEET**  
Galactic C  
Art. no: 9055-3-02-3-ddd



# Galactic C

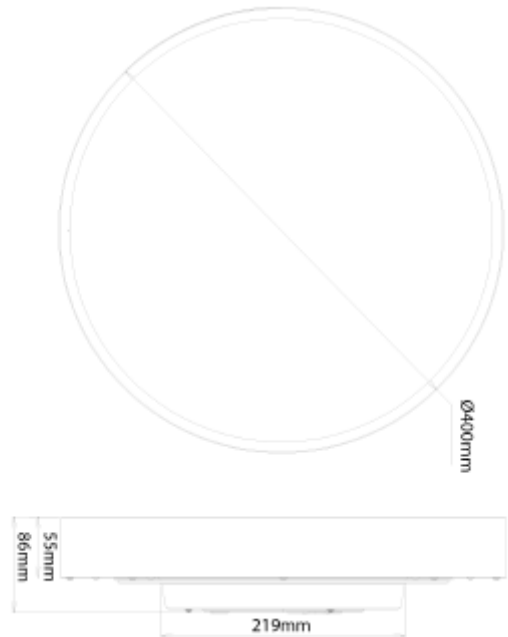

Art. no: 9055-3-02-3-ddd

| LIGHT TECHNICAL          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen LED (tc=25):       | 4200           |
| Beam Angle:              | 120°           |
| CCT (Color Temperature): | 2700-3000K     |
| CRI / Ra:                | 80             |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Micropris.     |

| ELECTRICAL DATA      |           |
|----------------------|-----------|
| Dimming:             | DALI2     |
| System Power [W]:    | 40        |
| System Voltage [V]:  | 230V 50Hz |
| Protection Class:    | 1         |
| Socket / Cap-Base:   | N/A       |
| Current Output [mA]: | 900       |

| MOUNTING / CONNECTION |                                    |
|-----------------------|------------------------------------|
| Connection:           | QuickConnect                       |
| Cut-out [mm]:         | Ø220-Ø250                          |
| Mounting:             | Partial-recessed, Surface, Pendant |

| PRODUCT                     |                 |
|-----------------------------|-----------------|
| Ingress Protection:         | IP40            |
| Operating Temperature [°C]: | -20 - 45        |
| Lifetime [h]:               | L80B10: 100 000 |
| Color:                      | White           |
| RAL:                        | RAL9010         |
| Height [mm]:                | 86              |
| Width [mm]:                 | 400             |
| Weight [kg]:                | 3,2             |