




PRODUCT FAMILY SHEET


Tigrus 360° Rotatable

NORLUX®

Lighting Solutions

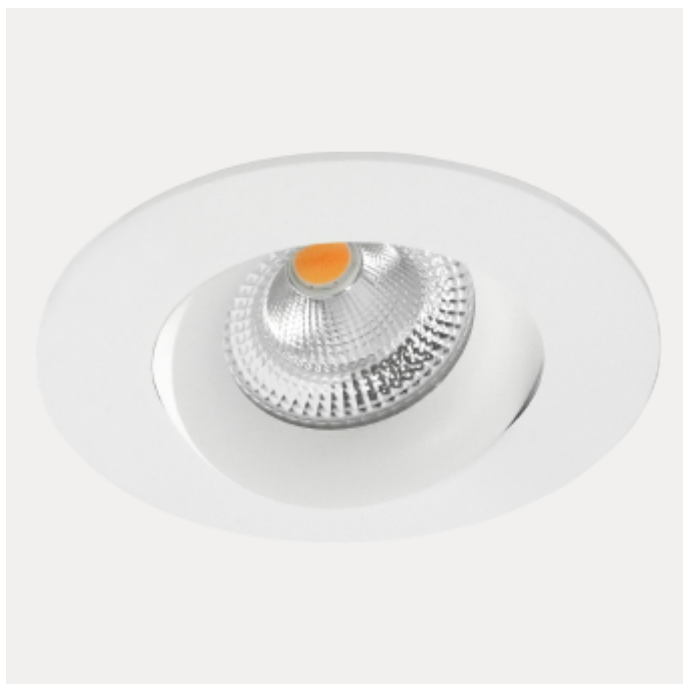

80-83mm

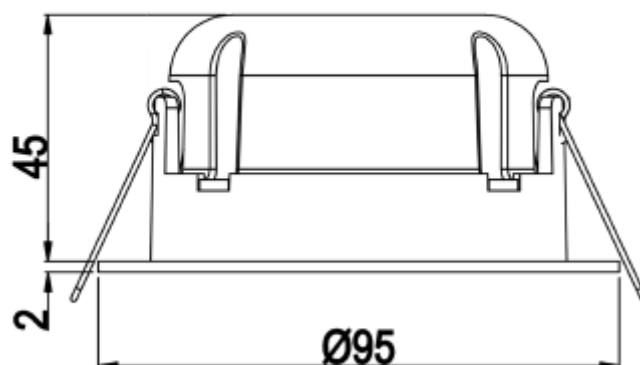

Tigrus 360° Rotatable

Tigrus 360° Rotatable can be mounted directly in insulation. Downlight have CRI>95 and are delivered with 2700K or Dim2Warm. The downlight can be tilted 25° and it's 360° rotatable. The luminaire connects easily without using a screwdriver. Cut-out 80-83mm.

VERSIONS

Art.No	Effect [W]	Cold Lumen [lm]	Lumen Output [lm]	CCT [K]	Beam Angle [°]	Lens Difuser	CRI [>]	Color	Light Control	Connection
25927-D2W-36-2	8	550	500	00-1800K D	36°	Clear	95	Black	Phase-Cut	QuickConnect
25927-D2W-36-3	8	550	500	00-1800K D	36°	Clear	95	White	Phase-Cut	QuickConnect
25927-36-2	7	550	494	2700	36°	Clear	95	Black	Phase-Cut	QuickConnect
25927-36-3	7	550	494	2700	36°	Clear	95	White	Phase-Cut	QuickConnect