



PRODUCT SHEET





Gyre Up&Down 800lm 830 24° 10W BK

Art. no: 101520-24-2

NORLUX®

Lighting Solutions

Gyre Up&Down 800lm 830 24° 10W BK

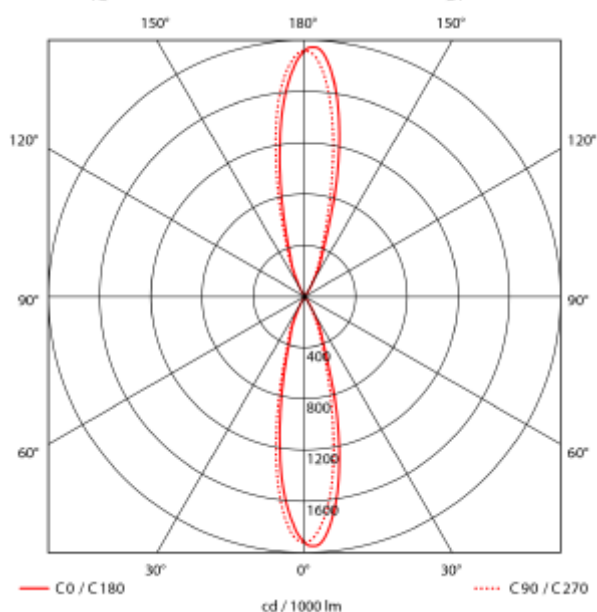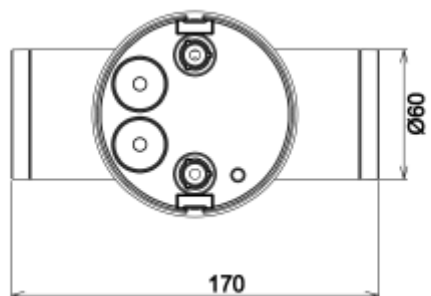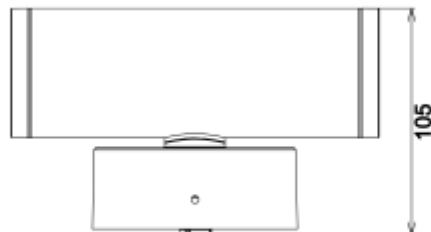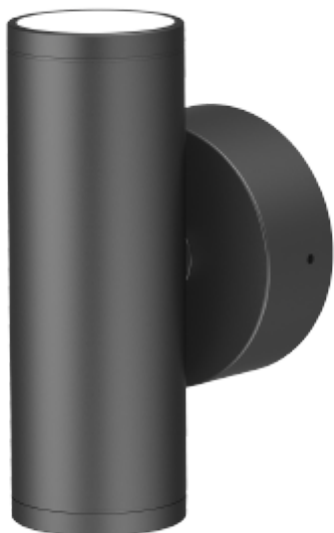

Wall mounted luminaire with up / downlight for outdoors use. Delivered with 3000K and 24° beam angle. Made of die-cast aluminum.



SPECIFICATIONS

| | |
|--------------------------|-----------------|
| System Power [W]: | 10W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 760lm |
| Lumen LED (tc=25): | 800lm |
| Beam Angle: | 24° |
| Lens (Diffuser): | Clear |
| Dimming: | None |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Wall |
| Lifetime [h]: | L80B10: 50.000h |
| Lumen/W: | 76lm/W |
| MacAdam (SDCM): | 3 |
| Color: | Black |
| Length [mm]: | 105mm |
| Height [mm]: | 170mm |
| Width [mm]: | 60mm |
| Weight [kg]: | 0,6kg |