



PRODUCT SHEET

C Line NWC

Art. no: 102517-2-NW-01-1

NORLUX®


Lighting Solutions

C Line NWC



SPECIFICATIONS

Lightsource Type:	LED (replaceable)
System Power [W]:	80W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	13600lm
Lumen LED (tc=25):	15800lm
Beam Angle:	90°
Lens (Diffuser):	Clear
Dimming:	Norlux Wireless Connect
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Quickconnectx2
Mounting:	Surface, Ceiling
Lifetime [h]:	L80: 100 000h
Lumen/W:	170lm/W
MacAdam (SDCM):	3
Color:	Steel
Length [mm]:	1550mm
Height [mm]:	50mm
Width [mm]:	76mm
Weight [kg]:	2,54kg

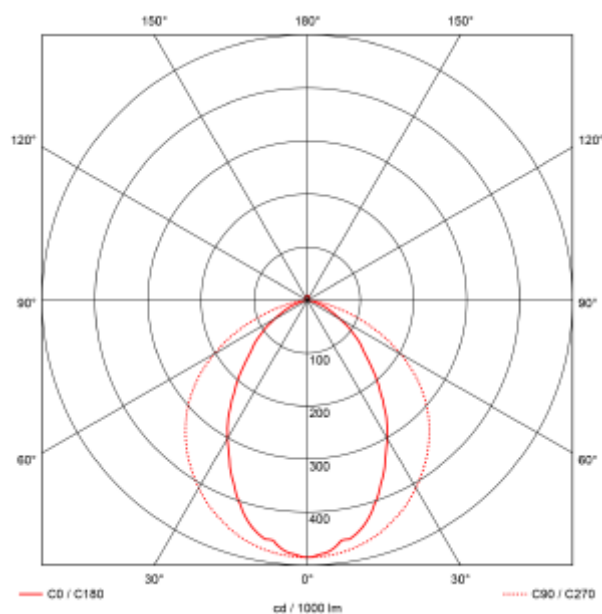

C Line NWC is an industrial light fixture for ceiling mounting, with input for mounting Norlux Wireless Connect sensor or node. With Norlux Wireless Connect integrated into the luminaire, you have modern lighting control technology without the need for extra cabling. This opens up opportunities for control, dimming, individual grouping, and sensor integration completely wirelessly with Bluetooth communication. Simple programming via smartphone (iOS or Android). The luminaire has many applications such as industrial and warehouse use.

Download the app here:

[Norlux Wireless Connect . iOS](#)

[Norlux Wireless Connect . Android](#)