



## PRODUCT SHEET


Anka

Art. no: 6710-04-1

# NORLUX®

Lighting Solutions

## Anka

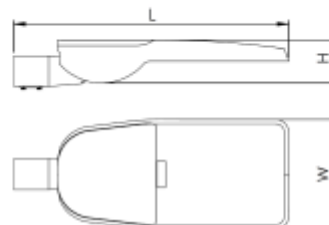


| L, mm | W, mm | H, mm |
|-------|-------|-------|
| 525   | 250   | 102   |
| 625   | 288   | 102   |
| 776   | 320   | 102   |



A++

### SPECIFICATIONS

|                          |                  |
|--------------------------|------------------|
| Lightsource Type:        | LED (built in)   |
| System Power [W]:        | 26,2W            |
| CCT (Color Temperature): | 3000K            |
| CRI / Ra:                | 70               |
| Lumen Output:            | 3297lm           |
| Lumen LED (tc=25):       | 3400lm           |
| Beam Angle:              | R1 Assymetric    |
| Dimming:                 | None             |
| System Voltage [V]:      | 230V 50Hz        |
| Connection:              | Terminal         |
| Mounting:                | Wall, Mast       |
| Lifetime [h]:            | L90B10: 100 000h |
| Lumen/W:                 | 126lm/W          |
| MacAdam (SDCM):          | 3                |
| Color:                   | Grey             |
| Length [mm]:             | 525mm            |
| Height [mm]:             | 102mm            |
| Width [mm]:              | 250mm            |
| Weight [kg]:             | 5kg              |

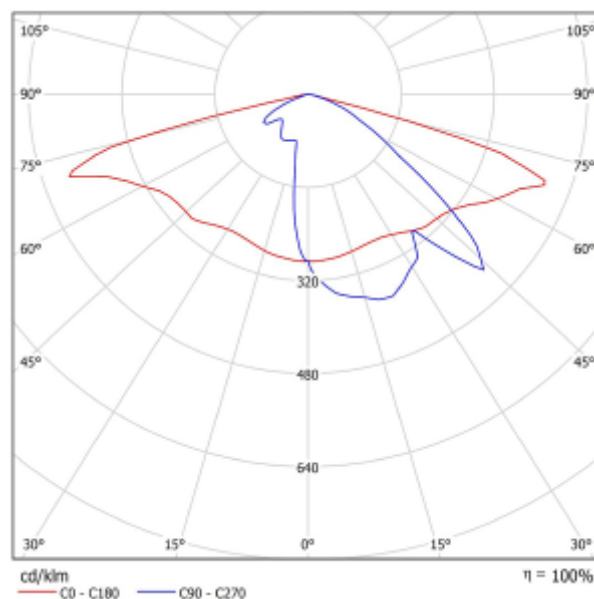

Anka is a luminaire for post mounting. We have developed this luminaire with an asymmetrical reflector giving a wide spread light, see light distribution diagram below. Anka has a post fixation opening with a diameter of 60mm. The luminaire has an IP66 classification and this guarantees that it will withstand very demanding conditions.