




FDV SPEC SHEET
 Bladeline Z
 Art. no: 101138-01-1-ddd



Bladeline Z

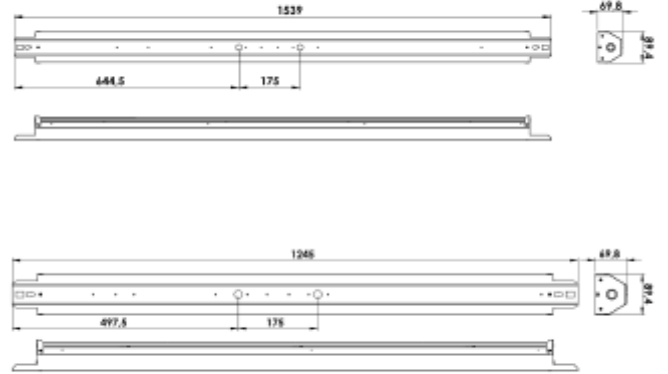

Art. no: 101138-01-1-ddd

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	13082
Lumen LED (tc=25):	13200
Beam Angle:	Wide
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	3
UGR (<=):	21

ELECTRICAL DATA	
Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
System Power [W]:	75
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	13
Max load pr circuit - B16:	21
Max load pr circuit - C10:	21
Max load pr circuit - C16:	35
Leakage current [mA]:	0,15
Inrush current I _{max} [A]:	29
Inrush current time [µs]:	155
Socket / Cap-Base:	N/A
Current Output [mA]:	500
Voltage Forward Min [V]:	140,6
Voltage Forward Max [V]:	142,6



FDV SPEC SHEET

Bladeline Z

Art. no: 101138-01-1-ddd



Lighting Solutions

PRODUCT	
Ingress Protection:	IP23
Impact Protection:	IK05
Operating Temperature [°C]:	0 - 40
Lifetime [h]:	L80B50: 100 000
Color:	Aluminium
Length [mm]:	1539
Height [mm]:	70
Width [mm]:	90
Weight [kg]:	4
Housing Material :	Aluminium

MOUNTING / CONNECTION	
Connection:	QuickConnect
Through-wiring (mm ²):	5x2,5
Mounting:	Surface, Ceiling