




## FDV SPEC SHEET

T-Line

Art. no: 5035-90-3

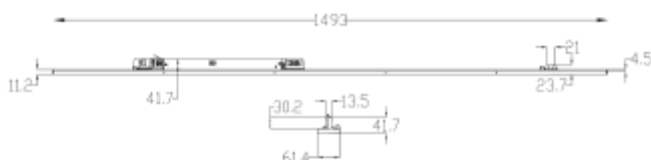

# T-Line



Art. no: 5035-90-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7132
Lumen LED (tc=25):	7500
Beam Angle:	90°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Lens

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track

### ELECTRICAL DATA

Dimming:	None
Standby power Psb (W) <:	Aktiv
Flicker metric (Pst LM) <:	Aktiv
Stroboscopic effect metric (SVM) <:	Aktiv
System Power [W]:	50(45-60)
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	24
Max load pr circuit - B16:	30
Max load pr circuit - C10:	24
Max load pr circuit - C16:	38
Leakage current [mA]:	0,25
Inrush current Imax [A]:	20
Inrush current time [µs]:	136



## FDV SPEC SHEET

T-Line

Art. no: 5035-90-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-25 - 60
Lifetime [h]:	L80B10: 100 000
Color:	White
RAL:	RAL9016
Length [mm]:	1493
Height [mm]:	11
Width [mm]:	61,4
Weight [kg]:	1,32