




## FDV SPEC SHEET

Tania Mini  
Art. no: 3550-36-2



Lighting Solutions

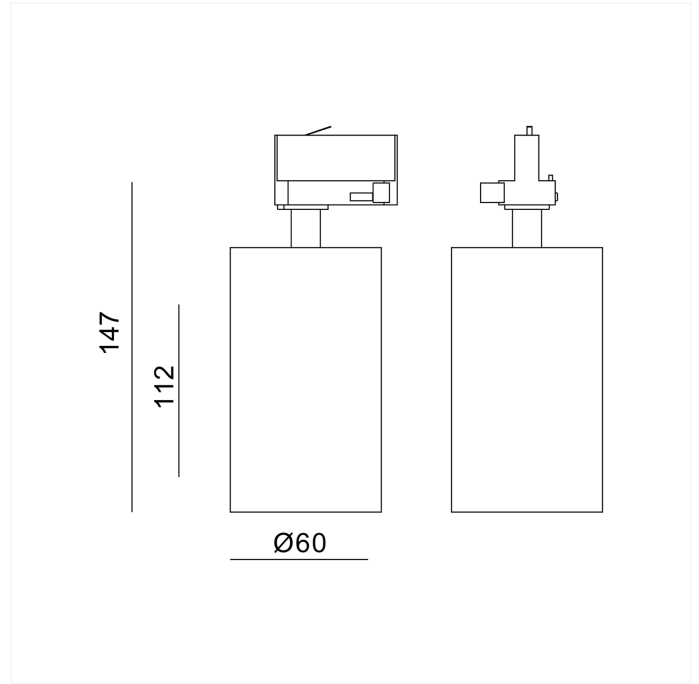

# Tania Mini



Art. no: 3550-36-2

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 1400           |
| Lumen LED (tc=25):       | 1550           |
| Beam Angle:              | 36°            |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 90             |
| Color Code:              | 930            |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Clear          |

### MOUNTING / CONNECTION

|             |                 |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting:   | Ceiling, Track  |

### PRODUCT

|                             |       |
|-----------------------------|-------|
| Ingress Protection:         | IP20  |
| Operating Temperature [°C]: | -     |
| Color:                      | Black |
| Length [mm]:                | 147   |
| Width [mm]:                 | 60    |

### ELECTRICAL DATA

|                            |           |
|----------------------------|-----------|
| Dimming:                   | Phase-Cut |
| System Power [W]:          | 14,5      |
| System Voltage [V]:        | 230V 50Hz |
| Protection Class:          | 1         |
| Max load pr circuit - B10: | 35        |
| Max load pr circuit - B16: | 56        |
| Max load pr circuit - C10: | 74        |
| Max load pr circuit - C16: | 118       |
| Current Output [mA]:       | 350       |