





## FDV SPEC SHEET

Bladeline

Art. no: 0261-4E-02-3



Lighting Solutions

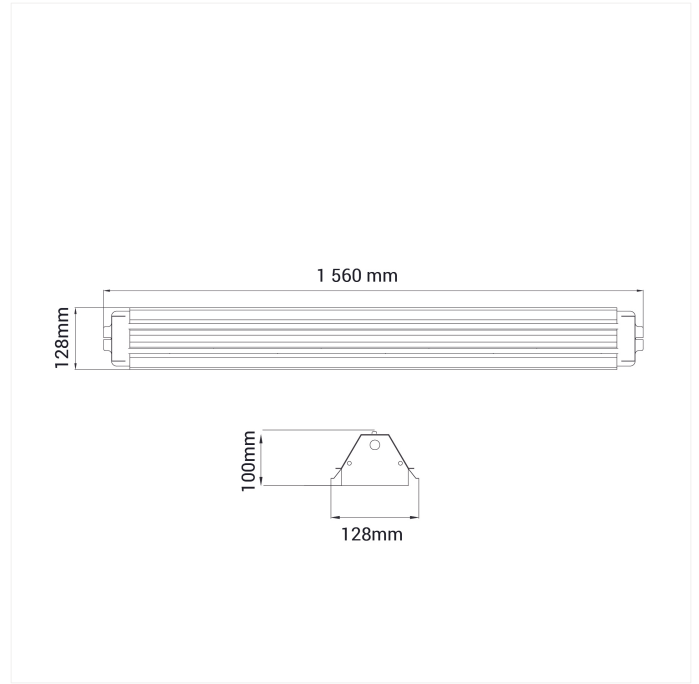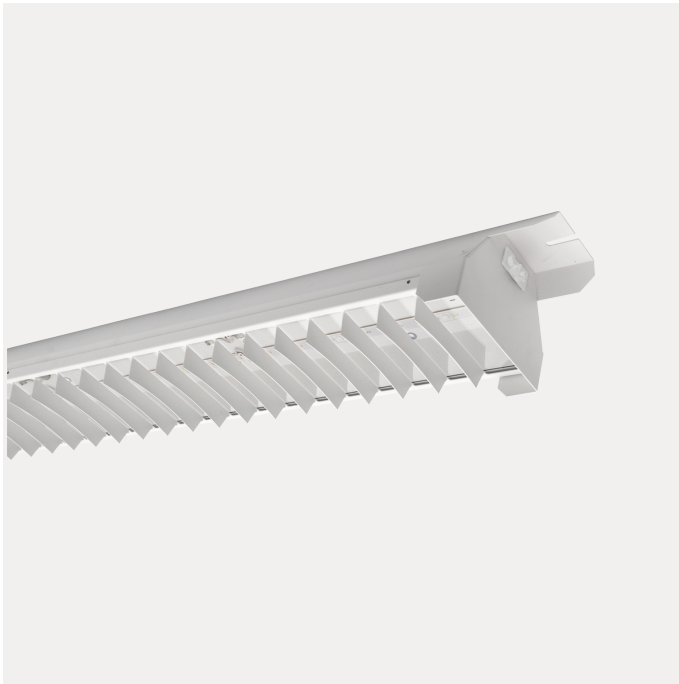

# Bladeline



Art. no: 0261-4E-02-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7128
Lumen LED (tc=25):	7300
Beam Angle:	110°
CCT (Color Temperature):	2700
CRI / Ra:	80
Color Code:	827
MacAdam (SDCM):	3
Lens (Diffuser):	Crossblade

### ELECTRICAL DATA

Dimming:	None
System Power [W]:	66
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	18
Max load pr circuit - B16:	29
Max load pr circuit - C10:	30
Max load pr circuit - C16:	48
Leakage current [mA]:	0,3
Inrush current I <sub>max</sub> [A]:	33
Inrush current time [μs]:	162
Socket / Cap-Base:	N/A
Current Output [mA]:	450
Emergency light [h]:	1 hour
Emergency light testing:	Manual
Emergency lumen out [lm]:	450



## FDV SPEC SHEET

Bladeline

Art. no: 0261-4E-02-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-10 - 40
Color:	White
Length [mm]:	156
Height [mm]:	100
Width [mm]:	128

### MOUNTING / CONNECTION

Connection:	18i5x2
Mounting:	Ceiling