

Bladeline


0181-02-1



Bladeline is a highly flexible LED luminaire due to the fact that it may be installed surface mounted on the ceiling or on electrical tracks. The Bladeline has a efficiency LED driver providing a high light output. The Bladeline is an innovative LED luminaire with a white louvre front cover meet all demands for use in all retail - and industrial demands. The Louvre front cover made in aluminium reduces glare to a minimum level. The Bladeline is equipped with a chassis connector at each end to ensure a quick and efficient installation.



| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 81W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen LED (tc=25): | 10600lm |
| Beam Angle: | 90° |
| Lens (Diffuser): | Louvre |
| Dimming: | None |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i5x2 |
| Mounting: | Ceiling |
| Lumen/W: | 0lm/W |
| MacAdam (SDCM): | 3 |
| Color: | Grey |
| Length [mm]: | 1560mm |
| Height [mm]: | 113mm |
| Width [mm]: | 135mm |
| Weight [kg]: | 3,35kg |

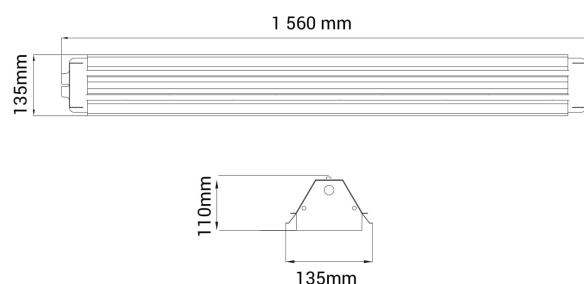

All specifications are nominal values, deviations may occur.
 Product specifications are subject to change without notice.
 Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company