


Bladeline

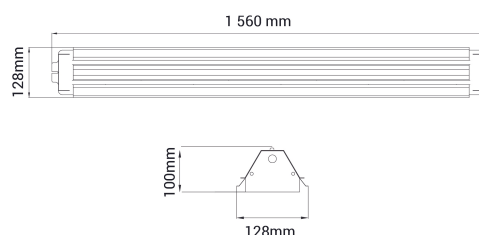

PRODUCT NO.:		0264-3-02-3	<div>IP20230V50Hz</div> <div></div>		<div>A++</div> - <div>A</div>	
LIGHT TECHNICAL			ELECTRICAL DATA			
Lightsource Type:		LED (built in)	Dimming:		None	
Lumen Output:		8020	System Power [W]:		68	
Lumen LED (tc=25):		10250	System Voltage [V]:		230V 50Hz	
Beam Angle:		110°	Protection Class:		1	
CCT (Color Temperature):		4000	Max load pr circuit - B10:		18	
CRI / Ra:		80	Max load pr circuit - B16:		30	
Color Code:		840	Max load pr circuit - C10:		30	
MacAdam (SDCM):		3	Max load pr circuit - C16:		50	
Lens (Diffuser):		Crossblade	Leakage current [mA]:		0,45	
PRODUCT			Inrush current I _{max} [A]:		33	
Ingress Protection:		IP20	Inrush current time [μs]:		250	
Operating Temperature [°C]:		-10 - 40	Socket / Cap-Base:		N/A	
Color:		White	Current Output [mA]:		450	
Length [mm]:		156	MOUNTING / CONNECTION			
Height [mm]:		100	Connection:		18i3x2	
Width [mm]:		128	Mounting:		Ceiling	