




PRODUCT SHEET

Panel

Art. no: 0340-3-02-3




Panel

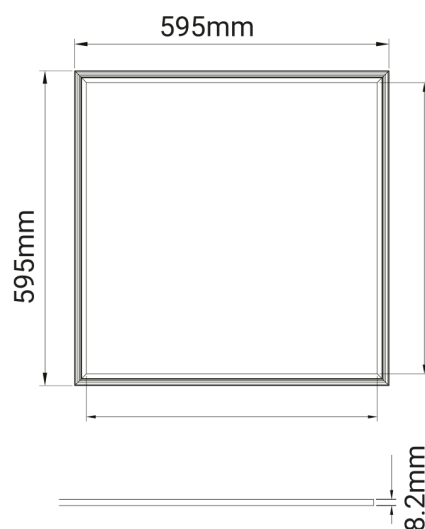

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	36W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	4000lm
Lumen LED (tc=25):	4900lm
Beam Angle:	110°
Lens (Diffuser):	Micropris.
Dimming:	Depending on Driver
System Voltage [V]:	230V 50Hz
Connection:	EPN0024
Mounting:	Recessed, Ceiling
Lifetime [h]:	L80B50: 100 000h
Lumen/W:	110lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Color:	White
Length [mm]:	595mm
Height [mm]:	8,2mm
Width [mm]:	595mm

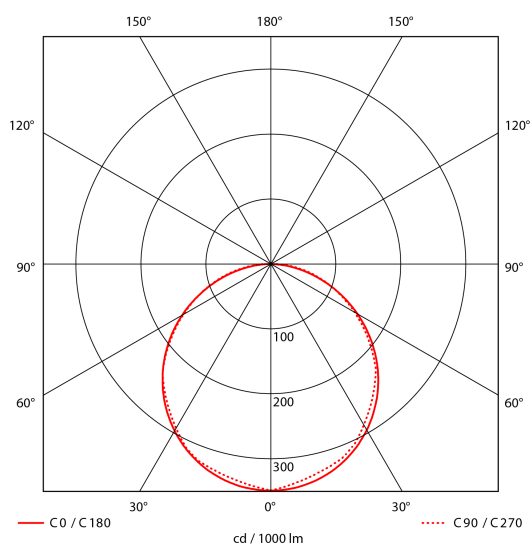

Panel is a luminaire suitable for interior use. It is design and developed to suite several applications, e.g. Recessed, Surface mount and as Pendant. The Panel has an microprismatic diffuser, EPN0024 connector and can be delivered with on/off or DALI2 driver. Panel can also be delivered with opal diffuser with >UGR19 Driver data are based on 0300-04 - Driver On/Off 900mA Panel max 40W 18i3 Male/ EPN0034.