



PRODUCT SHEET


Panel

Art. no: 0340-3-02-3




Lighting Solutions

Panel

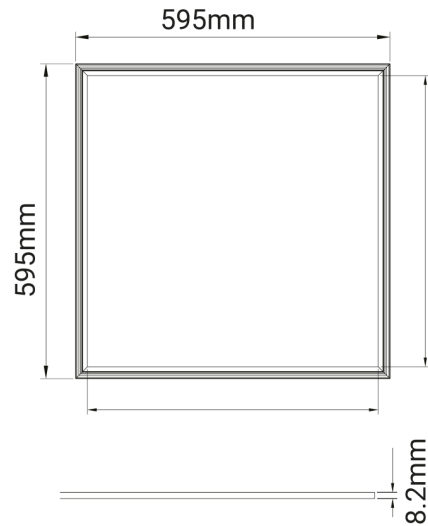

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	36W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	4000lm
Lumen LED (tc=25):	4900lm
Beam Angle:	110°
Lens (Diffuser):	Micropris.
Dimming:	Depending on Driver
System Voltage [V]:	230V 50Hz
Connection:	EPN0024
Mounting:	Recessed, Ceiling
Lifetime [h]:	L80B50: 100 000h
Lumen/W:	110lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Color:	White
Length [mm]:	595mm
Height [mm]:	8,2mm
Width [mm]:	595mm

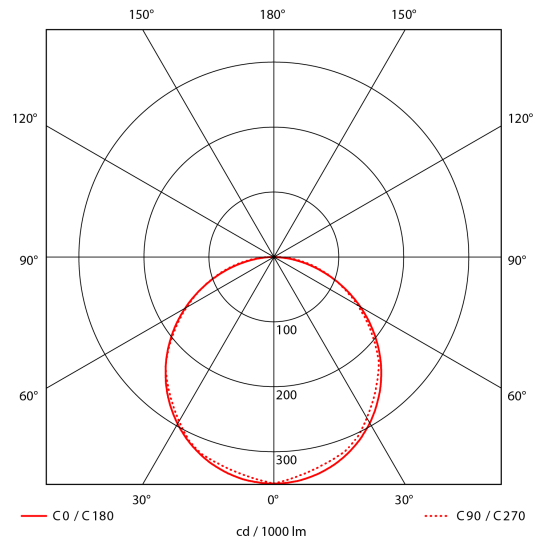

Panel is a luminaire suitable for interior use. It is design and developed to suite several applications, e.g. Recessed, Surface mount and as Pendant. The Panel has a microprismatic diffuser, EPN0024 connector and can be delivered with on/off or DALI2 driver. Panel can also be delivered with opal diffuser with >UGR19 Driver data are based on 0300-04 - Driver On/Off 900mA Panel max 40W 18i3 Male/ EPN0034.