



Trimo Micro

18015-6-30-2-ddd



Tired of downlights giving obtrusive light? This particular model requires a hole dimension of only 90mm. This makes it very versatile with a minimum of stray light, this is accomplished by using a recessed LED light source. The Trimo Micro has a 18i3 connector and can be supplied with a variety of connector solutions.

90mm

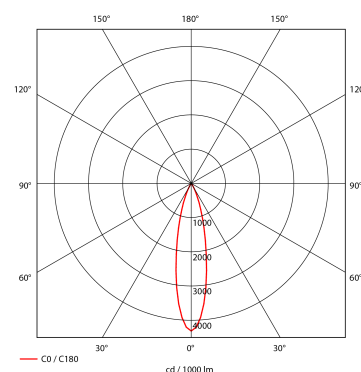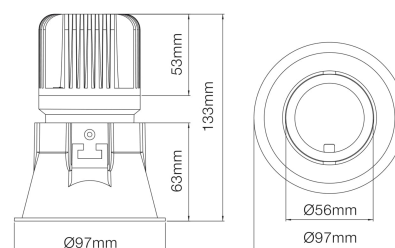

Lightsource Type:	LED (built in)
System Power [W]:	13W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen LED (tc=25):	2000lm
Beam Angle:	30°
Lens (Diffuser):	Clear
Dimming:	DALI
System Voltage [V]:	230V 50Hz
Connection:	18i5 DALI Quick connection
Mounting:	Ceiling, Recessed
Cut-out [mm]:	90mm
Lifetime [h]:	L80B10: 50.000h
Lumen/W:	90lm/W
UGR (<=):	16
MacAdam (SDCM):	3
Color:	Black
Height [mm]:	140mm
Width [mm]:	95mm
Weight [kg]:	0,65kg
To be recessed in insulation:	No

All specifications are nominal values, deviations may occur.
 Product specifications are subject to change without notice.
 Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company