




PRODUCT SHEET

Ray Mini

Art. no: 18154-6-30-2-dddd

Ledpro
by NORLUX

Ray Mini

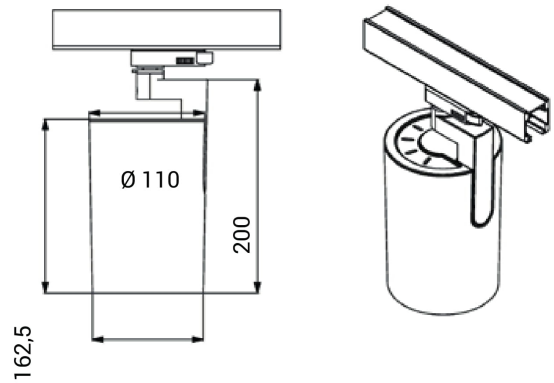

Ray Mini uses the possibilities created by new technology. The LED driver is mounted inside the luminaire body. This gives us a slim design combined with a powerful lightoutput that can be easily adjusted in all directions to meet all needs. Ray Mini can be tilted 90 degrees and rotated 350 degrees its own axis. To create further opportunities to play with light you can mount a diffuser on the luminaire, this can be ordered separately.



SPECIFICATIONS

Lyskilde :	LED (built in)
Systemeffekt [W]:	23W
Fargetemperatur [K]:	2700K
Fargegjengivelse [CRI/Ra]:	80
Lumen LED (tc=25):	3131lm
Spredningsvinkel [°]:	30°
Optikk:	Clear
Dimmetype:	None
Spenning [V]:	230V 50Hz
Tilkobling:	Track 3-Circuit+dim
Montering:	Tak, Skinne
Lumen/W:	0lm/W
Fargetoleranse [SDCM]:	3
Farge :	Black
Høyde [mm]:	200mm
Bredde [mm]:	110mm