



# Linear

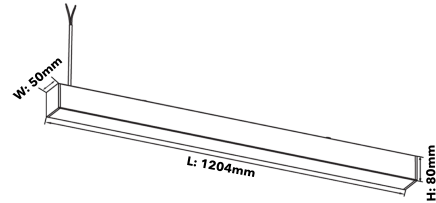

**PRODUCT NO.:**

19036-01-1



**LIGHT TECHNICAL**

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 2852           |
| Lumen LED (tc=25):       | 4300           |
| Beam Angle:              | 110°           |
| CCT (Color Temperature): | 3000           |
| CRI / Ra:                | 80             |
| Color Code:              | 830            |
| Lens (Diffuser):         | Opal           |

**ELECTRICAL DATA**

|                                      |           |
|--------------------------------------|-----------|
| Dimming:                             | None      |
| System Power [W]:                    | 36        |
| System Voltage [V]:                  | 230V 50Hz |
| Protection Class:                    | 2         |
| Max load pr circuit - B10:           | 16        |
| Max load pr circuit - B16:           | 25        |
| Max load pr circuit - C10:           | 18        |
| Max load pr circuit - C16:           | 28        |
| Leakage current [mA]:                | 5         |
| Inrush current I <sub>max</sub> [A]: | 60        |
| Inrush current time [μs]:            | 3,5       |
| Socket / Cap-Base:                   | N/A       |
| Voltage Forward Min [V]:             | 2,8       |
| Voltage Forward Max [V]:             | 3,1       |

**MOUNTING / CONNECTION**

|             |                 |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting:   | Ceiling, Track  |

**PRODUCT**

|                     |                |
|---------------------|----------------|
| Ingress Protection: | IP40           |
| Impact Protection:  | IK08           |
| Lifetime [h]:       | L80B50: 50.000 |
| Color:              | Grey           |
| Length [mm]:        | 1204           |
| Height [mm]:        | 140            |
| Width [mm]:         | 50             |
| Weight [kg]:        | 3,5            |