

# Acrux Adjustable

2302-36-3





Adjustable downlight with IP54 classification. Low glare and secluded light source and with modern reflector. Suitable for all rooms included bathroom. Complete with dimmable driver and quick connect for easy installation.



Lightsource Type:	LED (built in)
System Power [W]:	10W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	790lm
Lumen LED (tc=25):	850lm
Beam Angle:	36°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Ceiling, Recessed
Cut-out [mm]:	82-88mm
Lifetime [h]:	L80B10: 50.000h
Lumen/W:	61lm/W
MacAdam (SDCM):	3
Color:	White
Height [mm]:	55mm
Width [mm]:	95mm
To be recessed in insulation:	No

82-88mm

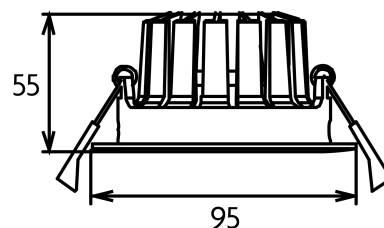

All specifications are nominal values, deviations may occur.  
 Product specifications are subject to change without notice.  
 Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company