




Seta Mini

30318-6-20-3

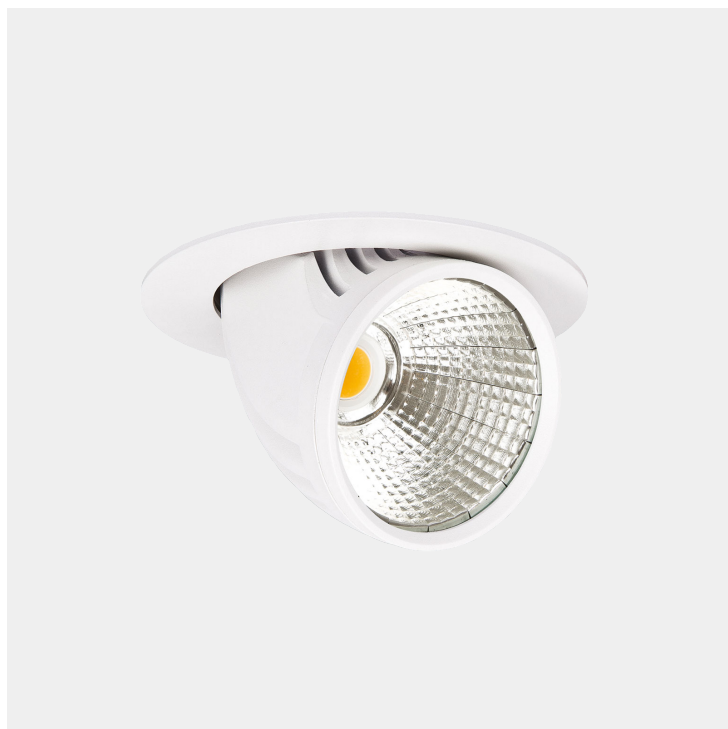

Seta Mini is a small and very flexible LED downlight offering great number of adjustment possibilities. The Seta Mini is supplied with a cable connector type 18i3- and can be delivered with a variety of connector options. The downlight is available in three different colors and with a wide range of reflectors. Rotatable 350° and tiltable 70°.

 140mm

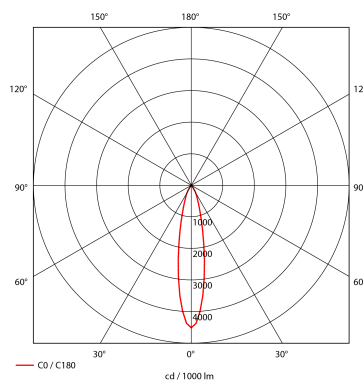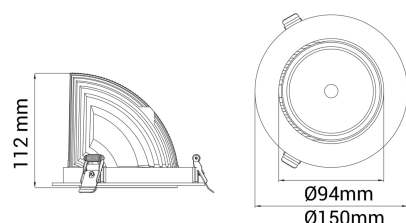

| | |
|-------------------------------|-----------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 28W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 3565lm |
| Lumen LED (tc=25): | 3950lm |
| Beam Angle: | 20° |
| Lens (Diffuser): | Clear |
| Dimming: | None |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i3 Quick connection |
| Mounting: | Ceiling, Recessed |
| Cut-out [mm]: | 140mm |
| Lifetime [h]: | L80B10: 50.000h |
| Lumen/W: | 127lm/W |
| UGR (<=): | 17 |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Length [mm]: | 150mm |
| Height [mm]: | 112mm |
| Width [mm]: | 150mm |
| Weight [kg]: | 0,95kg |
| To be recessed in insulation: | Not applicable |

All specifications are nominal values, deviations may occur.
Product specifications are subject to change without notice.

Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company