





FDV SPEC SHEET

Phoenix

Art. no: 3450-140-1018-ddd

Ledpro
by NORLUX

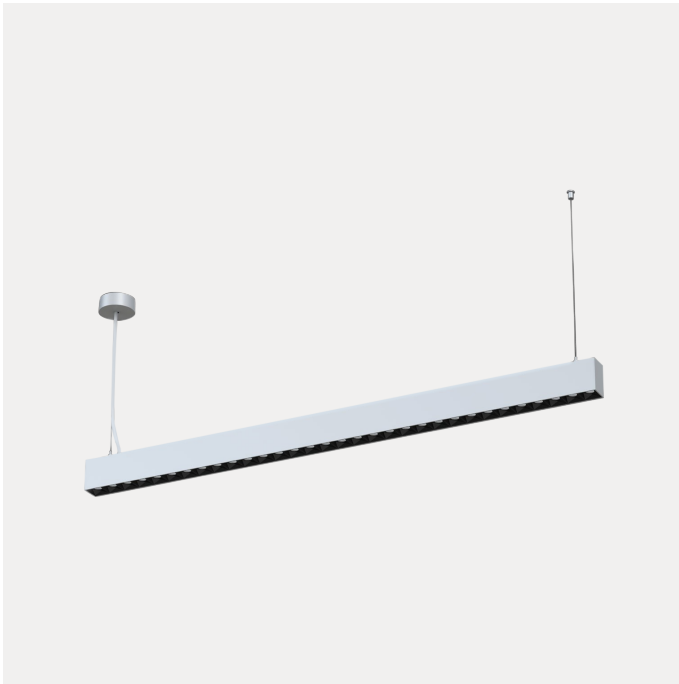

Phoenix



Art. no: 3450-140-1018-ddd

LYS TEKNISK

Lyskilde :	LED (built in)
Lumen ut (lm):	4000M/2000LM
Lumen LED (tc=25):	6000
Spredningsvinkel [°]:	140° /80°
Fargetemperatur [K]:	3000
Fargegjengivelse [CRI/Ra]:	80
Fargetoleranse [SDCM]:	3
UGR (<=):	10

MONTERING / TILKOBLING

Tilkobling:	Cable 3m
Montering:	Pendel, Tak

ELEKTRISK DATA

Dimmetype:	DALI
Systemeffekt [W]:	60
Spenning [V]:	230V 50Hz
Isolasjonsklasse:	1
Maks belastning pr kurs - B10:	4
Maks belastning pr kurs - B16:	7
Maks belastning pr kurs - C10:	8
Maks belastning pr kurs - C16:	14
Lekkasjestrøm [mA]:	0,75
Startstrøm I _{max} [A]:	30
Startstrøm tid [µs]:	158
Sokkel :	N/A



FDV SPEC SHEET

Phoenix

Art. no: 3450-140-1018-ddd

Ledpro
by NORLUX

PRODUKT

IP-grad:	IP20
Vandal klasse:	IK06
Driftstemperatur [°C]:	-20 - 45
Forventet Levetid :	L80B10: 50.000
Farge :	Zink Yellow
Lengde [mm]:	1285
Høyde [mm]:	76
Bredde [mm]:	48