




FDV SPEC SHEET

Tania Mini

Art. no: 3551-2-25-3



Lighting Solutions

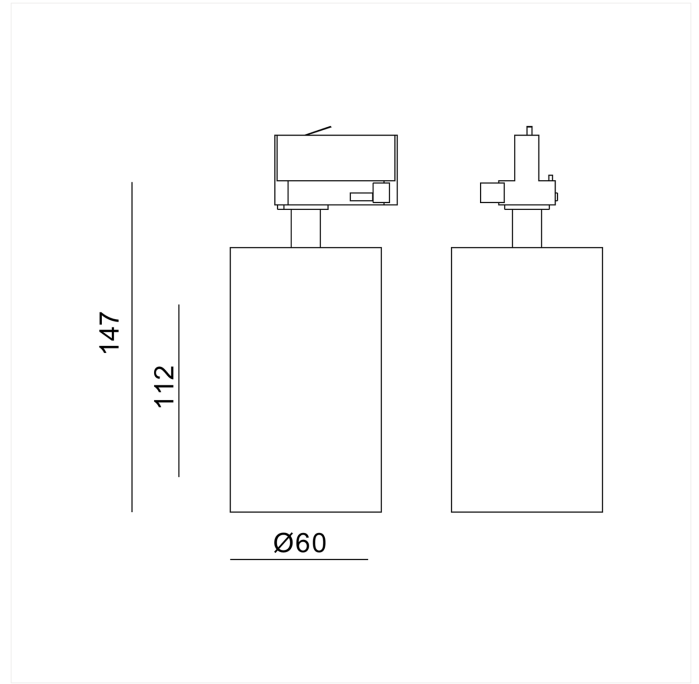

Tania Mini



Art. no: 3551-2-25-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1400
Lumen LED (tc=25):	1450
Beam Angle:	25°
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track, Ceiling

ELECTRICAL DATA

Dimming:	Phase-Cut
System Power [W]:	14,5
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	35
Max load pr circuit - B16:	56
Max load pr circuit - C10:	74
Max load pr circuit - C16:	118
Current Output [mA]:	350



FDV SPEC SHEET

Tania Mini

Art. no: 3551-2-25-3



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 55 000
Color:	White
Length [mm]:	147
Width [mm]:	60