




FDV SPEC SHEET

Tania Mini

Art. no: 3551-2-36-3



Lighting Solutions

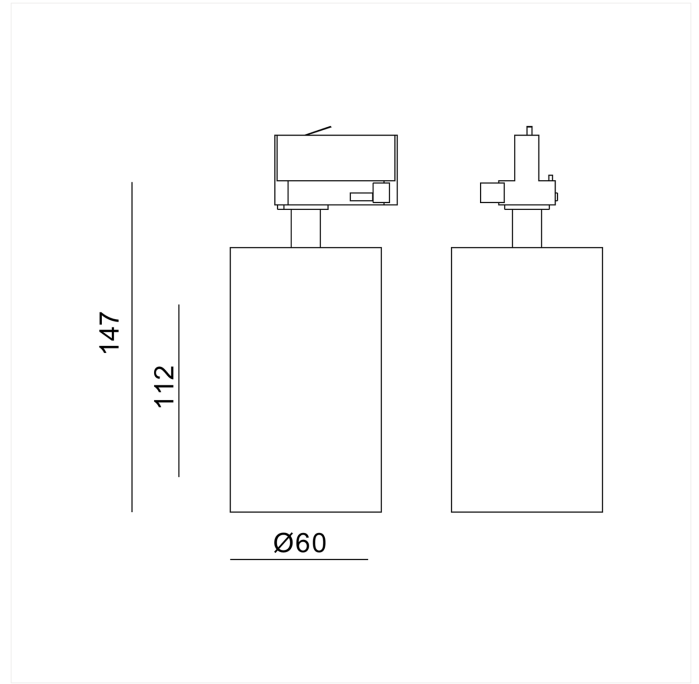

Tania Mini



Art. no: 3551-2-36-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 1050 |
| Lumen LED (tc=25): | 1450 |
| Beam Angle: | 36° |
| CCT (Color Temperature): | 2700 |
| CRI / Ra: | 90 |
| Color Code: | 927 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting: | Track, Ceiling |

ELECTRICAL DATA

| | |
|----------------------------|-----------|
| Dimming: | Phase-Cut |
| System Power [W]: | 14,5 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 35 |
| Max load pr circuit - B16: | 56 |
| Max load pr circuit - C10: | 74 |
| Max load pr circuit - C16: | 118 |
| Current Output [mA]: | 350 |



FDV SPEC SHEET

Tania Mini

Art. no: 3551-2-36-3



Lighting Solutions

PRODUCT

| | |
|-----------------------------|----------------|
| Ingress Protection: | IP20 |
| Operating Temperature [°C]: | -20 - 40 |
| Lifetime [h]: | L80B10: 55 000 |
| Color: | White |
| Length [mm]: | 147 |
| Width [mm]: | 60 |