


Panel



PRODUCT NO.:	0320-2-01-3
--------------	-------------

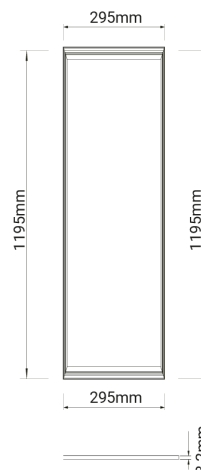

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen LED (tc=25):	4150
Beam Angle:	110°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

MOUNTING / CONNECTION	
Connection:	EPN0024
Mounting:	Ceiling, Recessed

PRODUCT	
Ingress Protection:	IP40
Impact Protection:	IK05
Lifetime [h]:	L70B50: 50 000
Color:	White
Length [mm]:	1195
Height [mm]:	8,6
Width [mm]:	295
Weight [kg]:	2,6

ELECTRICAL DATA	
Dimming:	Depending on Driver
System Power [W]:	36
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I _{max} [A]:	25
Inrush current time [μs]:	150
Voltage Forward Min [V]:	2,8
Voltage Forward Max [V]:	3,6