



# Panel

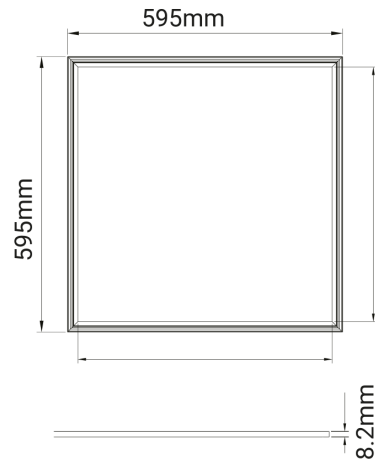

**PRODUCT NO.:**

0330-2-01-3



**LIGHT TECHNICAL**

Lightsource Type:	LED (built in)
Lumen Output:	3120
Lumen LED (tc=25):	4150
Beam Angle:	110°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

**ELECTRICAL DATA**

System Power [W]:	36
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I <sub>max</sub> [A]:	25
Inrush current time [µs]:	150
Voltage Forward Min [V]:	2,8
Voltage Forward Max [V]:	3,6

**MOUNTING / CONNECTION**

Connection:	EPN0024
Mounting:	Ceiling, Recessed

**PRODUCT**

Ingress Protection:	IP40
Impact Protection:	IK05
Lifetime [h]:	L70B50: 50 000
Color:	White
Length [mm]:	595
Height [mm]:	8,6
Width [mm]:	595
Weight [kg]:	2,97