

LED Panel


0330-2-01-3



Panel LED is a light fixture for interior use. It is constructed for fitting in to suspended ceilings. Panel LEDs can be installed as a pendant or mounted on ceiling surfaces. The Panel LED has an opal or micro prismatic diffusor. Choose between on/off, phasecut or DALI2 (CLO, Corridor, Push dim and Ready2mains) driver. See accessories for detailed information.



Lightsource Type:	LED (built in)
System Power [W]:	36W
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	3120lm
Lumen LED (tc=25):	4150lm
Beam Angle:	110°
Lens (Diffuser):	Opal
System Voltage [V]:	230V 50Hz
Connection:	EPN0024
Mounting:	Ceiling, Recessed
Lifetime [h]:	L70B50: 50 000h
Lumen/W:	87lm/W
MacAdam (SDCM):	3
Color:	White
Length [mm]:	595mm
Height [mm]:	8,6mm
Width [mm]:	595mm
Weight [kg]:	2,97kg

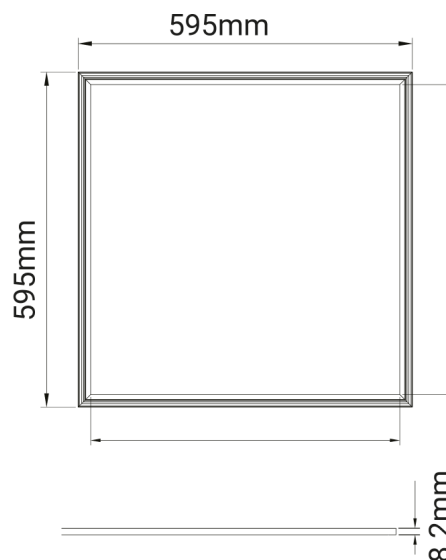

All specifications are nominal values, deviations may occur.
 Product specifications are subject to change without notice.
 Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company