


Panel



PRODUCT NO.: 0330-3-01-3-700mA

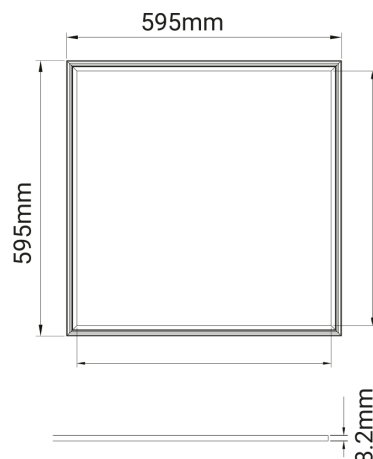

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen LED (tc=25):	3100
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

MOUNTING / CONNECTION

Connection:	EPN0024
Mounting:	Ceiling, Recessed

PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK05
Color:	White
Length [mm]:	595
Height [mm]:	8,2
Width [mm]:	595

ELECTRICAL DATA

Dimming:	None
System Power [W]:	31
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Leakage current [mA]:	0,45
Inrush current I _{max} [A]:	25
Inrush current time [μs]:	150
Current Output [mA]:	700
Voltage Forward Min [V]:	2,8
Voltage Forward Max [V]:	3,6