LED Panel 0340-01-3

NORLUX


Lighting Solutions



Panel LED is a light fixture for interior use. It is constructed for fitting in to suspended ceilings. Panel LEDs can be installed as a pendant or mounted on ceiling surfaces. The Panel LED has an opal or micro prismatic diffusor. Choose between on/off, phasecut or DALI2 (CLO, Corridor, Push dim and Ready2mains) driver. See accessories for detailed information.



| Lightsource Type: | LED (built in) |
|--------------------------|---------------------|
| System Power [W]: | 36W |
| CCT (Color Temperature): | 4000K |
| CRI / Ra: | 80 |
| Lumen Output: | 3254lm |
| Lumen LED (tc=25): | 4400lm |
| Beam Angle: | 110° |
| Lens (Diffuser): | Opal |
| Dimming: | Depending on Driver |
| System Voltage [V]: | 230V 50Hz |
| Connection: | EPN0024 |
| Mounting: | Ceiling, Recessed |
| Lumen/W: | 90lm/W |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Length [mm]: | 595mm |
| Height [mm]: | 8,6mm |
| Width [mm]: | 595mm |
| Weight [kg]: | 3,61kg |
| | |

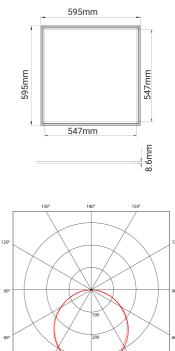

cd / 1000

- C0 / C180

All specifications are nominal values, deviations may occur.

Product specifications are subject to change without notice. Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company

A** -

--- C90/C270