

# LED Panel


0340-02-3



Panel is a luminaire suitable for interior use. It is design and developed to suite several applications, e.g. Recessed, Surface mount and as Pendant. The Panel has an microprismatic diffusor, EPN0024 connector and can be delivered with on/off or DALI2 driver. Panel can also be delivered with opal diffusor with >UGR19  
Driver data are based on 0300-04 - Driver On/Off 900mA Panel max 40W 18i3 Male/ EPN0034.



Lightsource Type:	LED (built in)
System Power [W]:	36W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen LED (tc=25):	4400lm
Beam Angle:	90°
Lens (Diffuser):	Micropris.
Dimming:	Depending on Driver
System Voltage [V]:	230V 50Hz
Connection:	EPN0024
Mounting:	Ceiling, Recessed
Lumen/W:	0lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Color:	White
Length [mm]:	595mm
Height [mm]:	8,6mm
Width [mm]:	595mm
Weight [kg]:	3,83kg

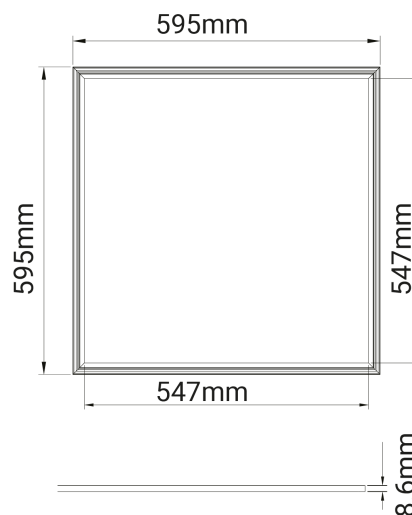

All specifications are nominal values, deviations may occur.  
Product specifications are subject to change without notice.  
Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company