NORLUX®
Lighting Solutions

Tania Mini

CE IP20 230V 50Hz

A⁺⁺ – A
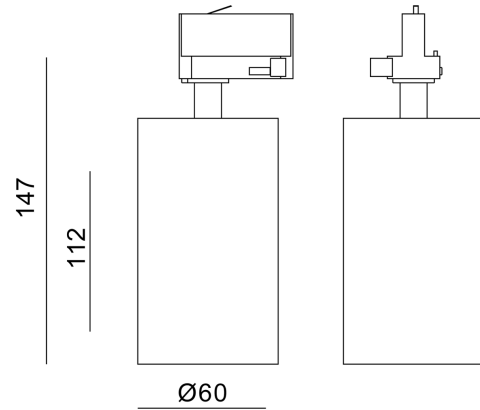
SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	14,5W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	1400lm
Lumen LED (tc=25):	1550lm
Beam Angle:	36°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
System Voltage [V]:	230V 50Hz
Connection:	Track 3-Circuit
Mounting:	Track, Ceiling
Lifetime [h]:	L80B10: 55 000h
Lumen/W:	94lm/W
MacAdam (SDCM):	3
Color:	White
Length [mm]:	147mm
Diameter [mm]:	60mm

147 112 Ø60

C0 / C180   cd / 1000 lm   C90 / C270
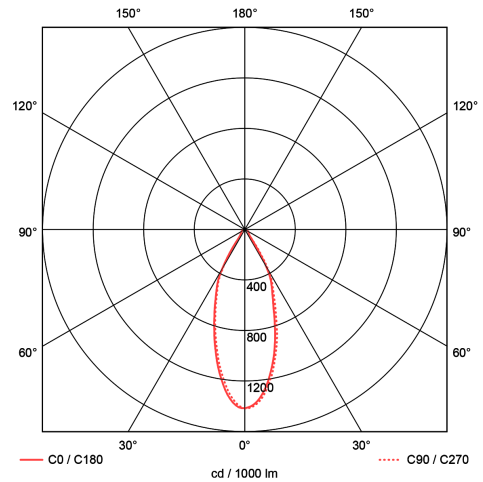
Tania Mini is a small spotlight in a contemporary design. Perfect for use at home and in other commercial settings. Choose between 1 or 3-circut connection. Front ring is sold separately. This version is with LED COB and no changeable lightbulb.