




FDV SPEC SHEET

Izar

Art. no: 3932-01-3-ddd



Lighting Solutions

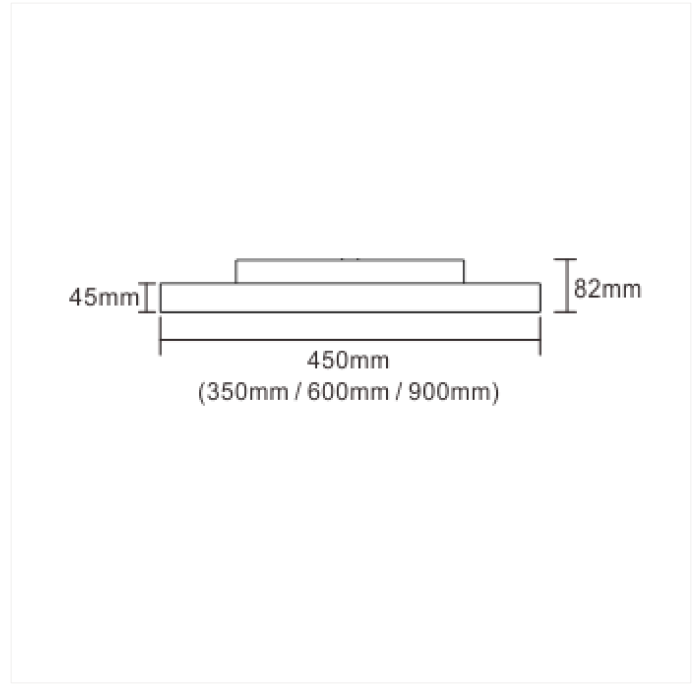

Izar



Art. no: 3932-01-3-ddd

| LIGHT TECHNICAL | |
|--------------------------|------------|
| Lumen Output: | 5588 |
| Lumen LED (tc=25): | 6500 |
| Beam Angle: | 90° / 110° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 80 |
| Color Code: | 830 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Opal |
| UGR (<=): | 18 |

| ELECTRICAL DATA | |
|--------------------------------------|-----------|
| Dimming: | DALI |
| System Power [W]: | 54 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 11 |
| Max load pr circuit - B16: | 17 |
| Max load pr circuit - C10: | 13 |
| Max load pr circuit - C16: | 21 |
| Leakage current [mA]: | 0,7 |
| Inrush current I _{max} [A]: | 30 |
| Inrush current time [µs]: | 120 |
| Socket / Cap-Base: | N/A |

| MOUNTING / CONNECTION | |
|-----------------------|---------------------------|
| Connection: | QuickConnect |
| Mounting: | Surface, Ceiling, Pendant |



FDV SPEC SHEET

Izar

Art. no: 3932-01-3-ddd



Lighting Solutions

PRODUCT

| | |
|---------------------|----------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK06 |
| Lifetime [h]: | L80B10: 50.000 |
| Color: | White |
| Height [mm]: | 82 |
| Width [mm]: | 600 |
| Weight [kg]: | 7,29 |