


ART. NO.

10100-2-01-7

10100-2-04-7

10101-2-01-7-ddd

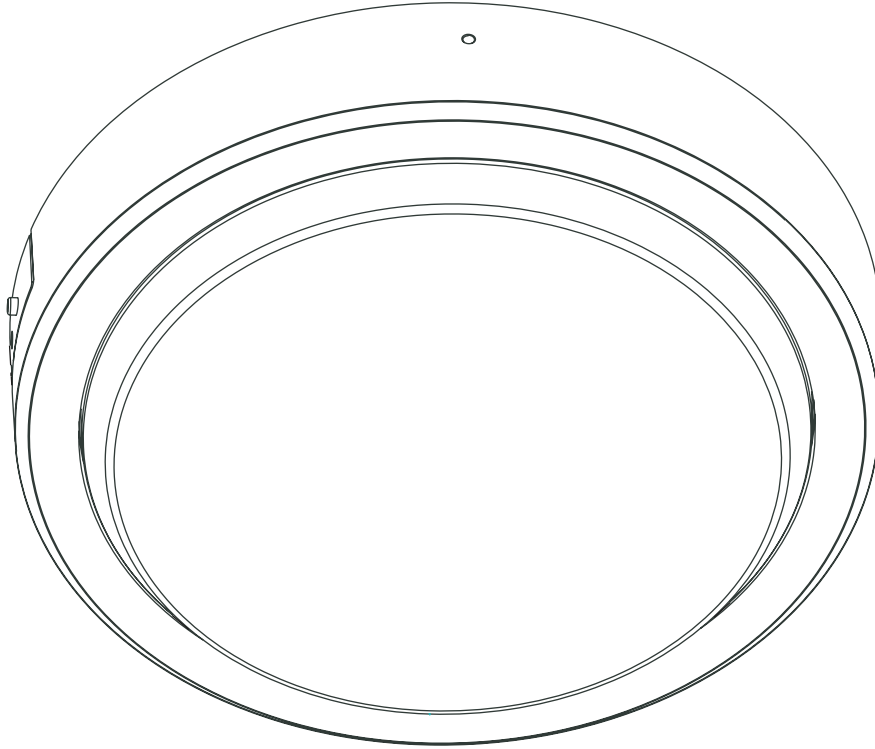

Yil

INSTALLATION MANUAL

**⚠ Safety Notes:**


- The product must be installed, maintained, and operated as instructions below.
- Before starting installation of this product, make sure power supply is disconnected.
- Only to be installed by authorized electrician.
- Do not use abrasives or solvents when cleaning.
- Do not install the product if it appears damaged in any way. Check with manufacturer if in doubt.
- Do not modify this fitting in any matter as this will void warranty.
- Check protection class, if class I, it must be earthed.
- Disconnect power supply before maintenance or cleaning.

⚠ Sikkerhetsinformasjon:

- Følg installasjonsmanual for korrekt montering.
- Koble alltid fra strømmen før montering eller vedlikehold.
- Kan kun monteres av autorisert elektriker.
- Monter ikke produktet hvis det er synlig skade. Kontakt forhandler eller produsent.
- Bruk ikke løsemidler ved rengjøring
- Produktet skal ikke under noen omstendigheter endres eller modifiseres.
- Sjekk produktets isolasjonsklasse. Ved isolasjonsklasse I skal produktet jordes.


Step 1

Take out the lamp and accessory.

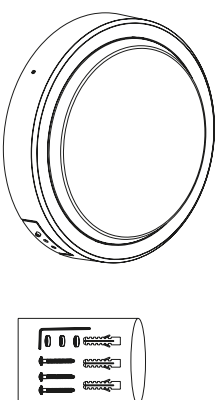


Step 5

Connect the DC plugs, put back the cover to the back plate and fix it by screws.

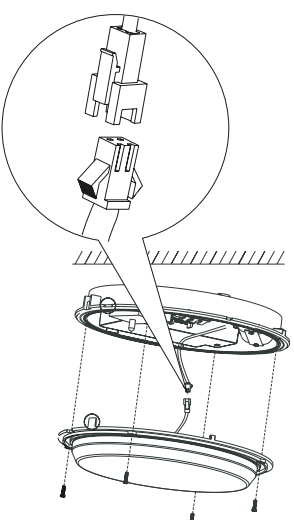


Step 2

Separate frame and lamp shade.




Step 8

Buckle the frame back and fix it by proper tools

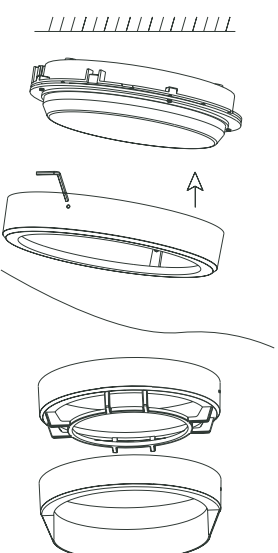


Step 3

Fix the back housing on the wall or ceiling by screws. Drill holes in the ceiling, put plastic anchor into the hole, put the silicone pad into the screw, then aim the base wad at the lamp base hole, fix the base wad by screws.

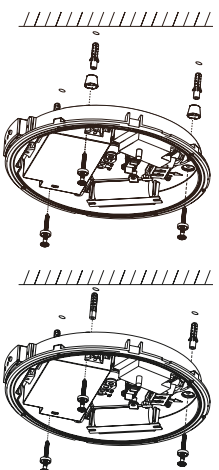

Step 7

Installation finished, turn on the switch.

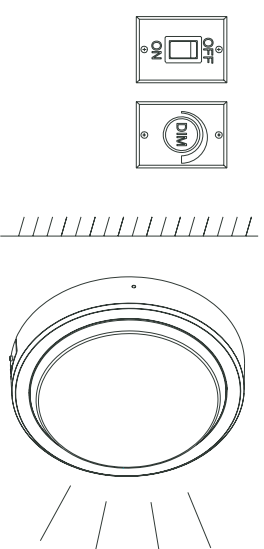

Step 4

- a. Connect the plugs between the battery and driver if with Emergency function.
- b. Choose the color temperature with DIP switch if it's the color changeable version.
- c. Choose the power with DIP switch if it's the wattage changeable version, (for 12 inch only)
- d. Connect the AC wires to the block.

