




PLUTO SENSOR Series

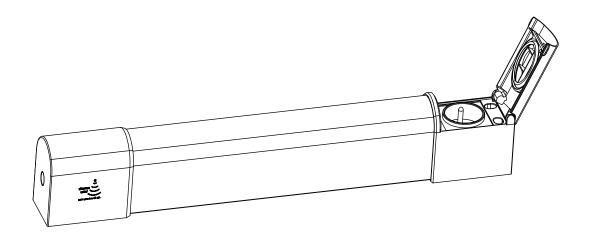

Product size:



Functional introduction:

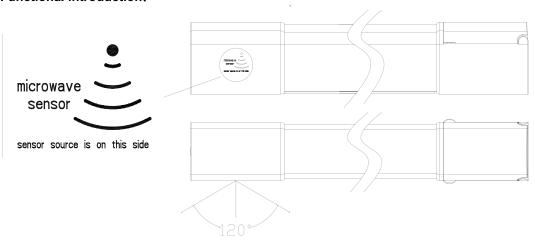

*Features:

- 1)The light will be switched on when you get into detecting range, and time delay is 60 seconds (the time won't be extended even you're detected again during this 60 seconds);
- 2)At the height of 3 meters. The detecting range is 1-4.5 meters


(under circumstance without EMI), Operating temperature:-20°C to 45°C

All specifications are nominal values, deviations may occur.


Product specifications are subject to change without notice.

Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company



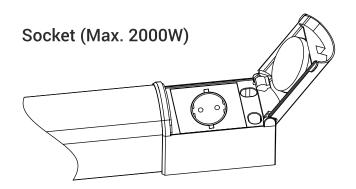

Installation information 1:

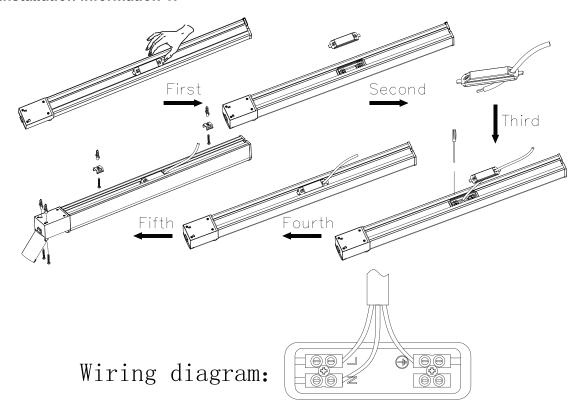

First: open the waterproof box cover.

Second: the wire go through the waterproof cover.

Third: screw the wire into the terminal.

Fourth: the waterproof cover assembly in place.

Fifth: install the lights properlly.

All specifications are nominal values, deviations may occur.

Product specifications are subject to change without notice.

Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company

制作要求:


材质:80g双胶纸

印刷:单色黑色印刷,灰色#eeeeee

尺寸:210*285mm A4正反面

料号:



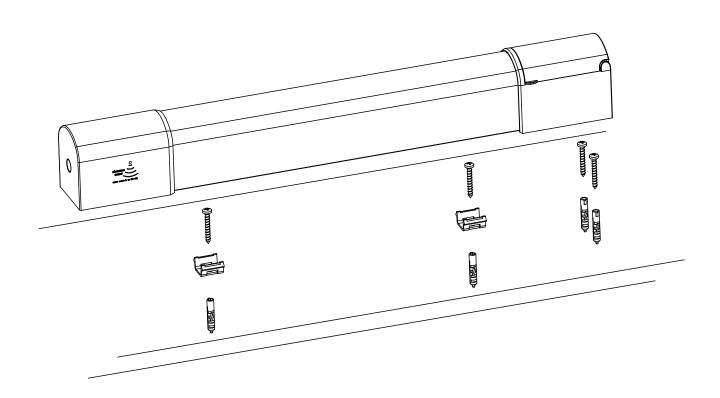

*Installation Notice:

- 1) Can not install in circumstance with strong EMI;
- 2) Avoid the continuous moving objects within detecting scope;
- 3)The detecting range canget through the concret wall, please take usage environment into consideration when fix the light.

Accessories:



All specifications are nominal values, deviations may occur.

Product specifications are subject to change without notice.

Electrical equipment designed to be part of a fixed electrical installation can only be installed by a registered installation company

制作要求:

材质:80g双胶纸

印刷:单色黑色印刷,灰色#eeeeee

尺寸:210*285mm A4单面

料号: