




FDV SPEC SHEET


Proxima

Art. no: 2101-90-3




Lighting Solutions

 200-210mm

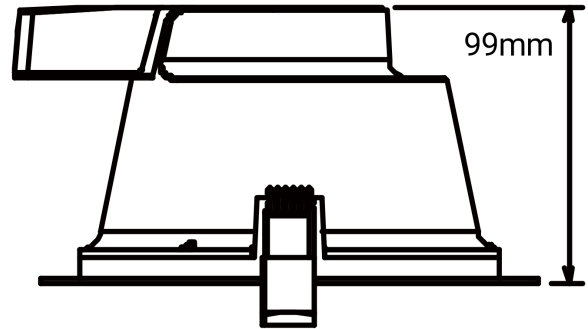

228mm

Proxima



Art. no: 2101-90-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2550(4000K)
Lumen LED (tc=25):	2700
Beam Angle:	90
CCT (Color Temperature):	3/4/5700
CRI / Ra:	80
Color Code:	830/840/857
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	Ø200-Ø210
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	None
System Power [W]:	25
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	24
Max load pr circuit - B16:	38
Max load pr circuit - C10:	24
Max load pr circuit - C16:	38
Inrush current I _{max} [A]:	106
Inrush current time [µs]:	8
Socket / Cap-Base:	N/A
Current Output [mA]:	150
Voltage Forward Min [V]:	65
Voltage Forward Max [V]:	75



FDV SPEC SHEET

Proxima

Art. no: 2101-90-3



Lighting Solutions

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP54
Impact Protection:	IK06
Lifetime [h]:	L80B10: 50.000
Color:	White
Height [mm]:	98
Width [mm]:	228