





FDV SPEC SHEET
 Tigrus 360° Surface Double
 Art. no: 31927-D2W-36-2

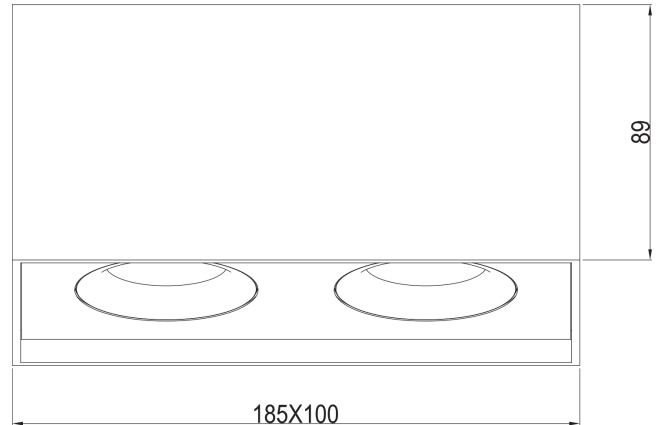

Tigrus 360° Surface Double



Art. no: 31927-D2W-36-2

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen LED (tc=25):	1000
Beam Angle:	36°
CCT (Color Temperature):	3000-1800K D2W
CRI / Ra:	95
MacAdam (SDCM):	3
Lens (Diffuser):	Clear
MOUNTING / CONNECTION	
Connection:	QuickConnect
Mounting:	Surface, Ceiling

ELECTRICAL DATA	
Dimming:	Phase-Cut
Flickerfree:	Yes
System Power [W]:	16
System Voltage [V]:	230V 50Hz
Protection Class:	2
Socket / Cap-Base:	N/A
Voltage Forward Min [V]:	15,5
Voltage Forward Max [V]:	18,5



FDV SPEC SHEET

Tigrus 360° Surface Double

Art. no: 31927-D2W-36-2



Lighting Solutions

PRODUCT

To be recessed in insulation:	Yes, recessed in insulation
Ingress Protection:	IP20
Impact Protection:	IK02
Color:	Black
Length [mm]:	185
Height [mm]:	89
Width [mm]:	100
Housing Material :	Aluminium
Housing Material :	Aluminium