



PRODUCT SHEET


Driver 700mA cc 15W (10-21V) Phasecut JB&SM

Art. no: AS-15-700TF-02



Lighting Solutions

Driver 700mA cc 15W (10-21V) Phasecut JB&SM

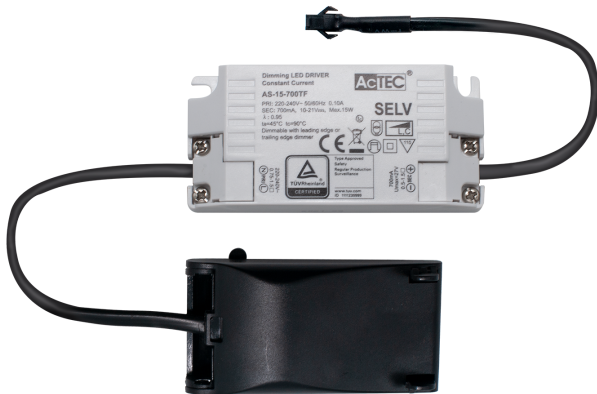

SPECIFICATIONS

System Power [W]:	15W
Dimming:	Phase-Cut
CC or CV:	CC
CC [mA]:	700 - mA
CC (forward voltage driver) [V]:	10 - 21V
Max output voltage [V]:	29
Output Current Tolerance [%]:	5%
Current Ripple [%]:	20%
Current setting:	None
Expected Lifetime:	50000h
System Voltage [V]:	230V 50Hz V
Protection Class:	2
Dimming Minimum Level :	1%
Dimming Phasecut Type:	Leading / Trailing edge
Max load pr circuit - B10:	140
Max load pr circuit - B16:	224
Max load pr circuit - C10:	280
Max load pr circuit - C16:	448
Inrush current I _{max} [A]:	5A
Inrush current time [μs]:	100μs
Manufacture:	ActiTEC
Manufacture P/N:	AS-15-700TF - Driver 700mA cc 15W (10-21V)
Primary Connection:	Quickconnect
Secondary Connection:	SM Connector
Length:	85mm
Height:	22mm
Width:	40,4mm



PRODUCT SHEET

Driver 700mA cc 15W (10-21V) Phasecut JB&SM

Art. no: AS-15-700TF-02



Lighting Solutions

Weight:

0,05kg