





FDV SPEC SHEET

Panel


Art. no: 0388-02-2



Lighting Solutions

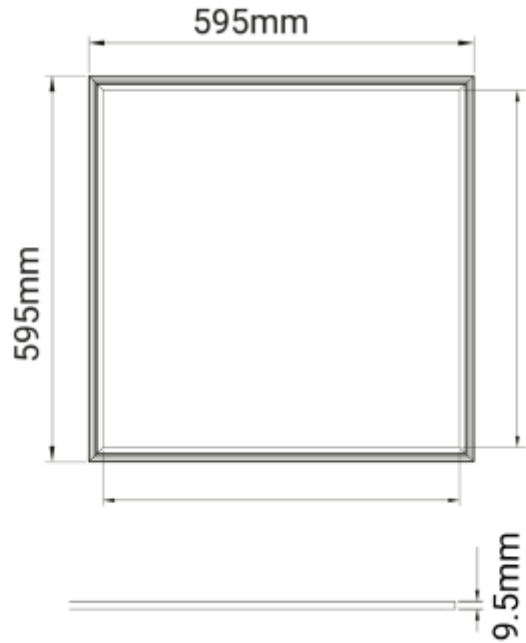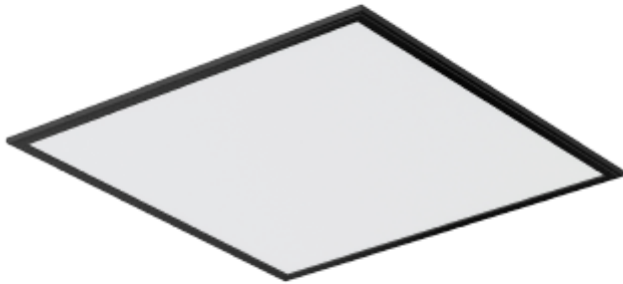

Panel



Art. no: 0388-02-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	4565
Lumen LED (tc=25):	5000
Beam Angle:	110°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.

MOUNTING / CONNECTION

Connection:	EPN0024
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	Depending on Driver
System Power [W]:	36
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I _{max} [A]:	25
Inrush current time [μs]:	150
Current Output [mA]:	900



FDV SPEC SHEET

Panel

Art. no: 0388-02-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK05
Operating Temperature [°C]:	-10 - 40
Lifetime [h]:	L80B50: 100 000
Color:	Black
Length [mm]:	595
Height [mm]:	9,5
Width [mm]:	595
Weight [kg]:	2,4
Housing Material :	Aluminium
Diffuser Material:	PMMA
Material 2:	Mechanical installed part(Steel)