



PRODUCT SHEET



Panel

Art. no: 0388-02-2



Lighting Solutions

Panel

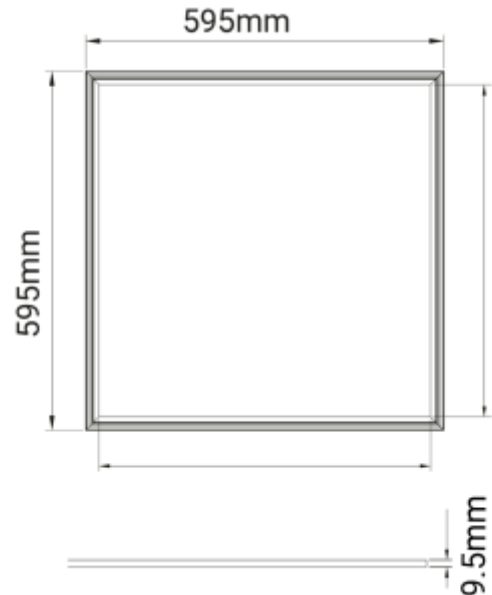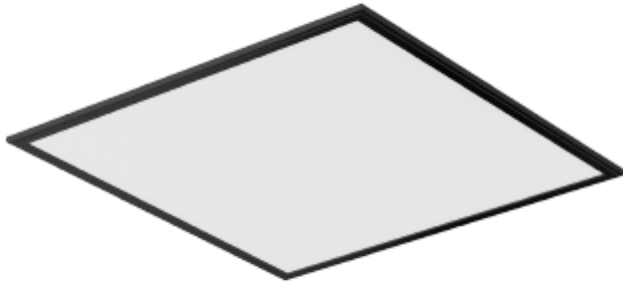

LED Panel with black frame and micro prismatic diffuser. Constructed for fitting in to suspended ceilings. Panel LEDs can be installed as a pendant or mounted on ceiling surfaces. Choose between on/off, phasecut or DALI2 (CLO, Corridor, Push dim and Ready2mains) driver.



SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	36W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	4565lm
Lumen LED (tc=25):	5000lm
Beam Angle:	110°
Lens (Diffuser):	Micropris.
Dimming:	Depending on Driver
System Voltage [V]:	230V 50Hz
Connection:	EPN0024
Mounting:	Recessed, Ceiling
Lifetime [h]:	L80B50: 100 000h
Lumen/W:	126lm/W
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	595mm
Height [mm]:	9,5mm
Width [mm]:	595mm
Weight [kg]:	2,4kg