





## FDV SPEC SHEET

Bladeline Z

Art. no: 101131-00-1



Lighting Solutions

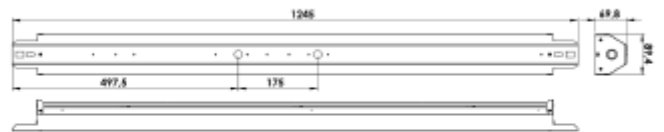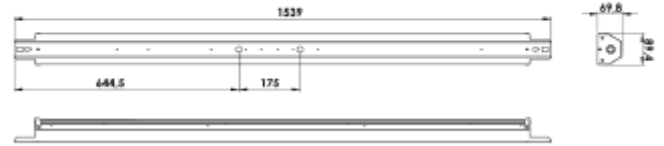

# Bladeline Z



Art. no: 101131-00-1

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7166
Lumen LED (tc=25):	7400
Beam Angle:	Medium
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
UGR (<=):	18

### ELECTRICAL DATA

Dimming:	None
Flicker metric (Pst LM) <:	0,02
Stroboscopic effect metric (SVM) <	0,02
System Power [W]:	42
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	21
Max load pr circuit - B16:	34
Max load pr circuit - C10:	35
Max load pr circuit - C16:	57
Leakage current [mA]:	0,3
Inrush current I <sub>max</sub> [A]:	23
Inrush current time [µs]:	176
Socket / Cap-Base:	N/A
Current Output [mA]:	350
Voltage Forward Min [V]:	110,6
Voltage Forward Max [V]:	112,9



## FDV SPEC SHEET

Bladeline Z

Art. no: 101131-00-1



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP23
Impact Protection:	IK05
Operating Temperature [°C]:	0 - 40
Lifetime [h]:	L80B50: 100 000
Color:	Aluminium
Length [mm]:	1245
Height [mm]:	70
Width [mm]:	90
Weight [kg]:	3,4
Housing Material :	Aluminium

### MOUNTING / CONNECTION

Connection:	QuickConnect
Through-wiring (mm2):	5x2,5
Mounting:	Surface, Ceiling