



PRODUCT SHEET



Bladeline Z

Art. no: 101131-01-1



Lighting Solutions

Bladeline Z

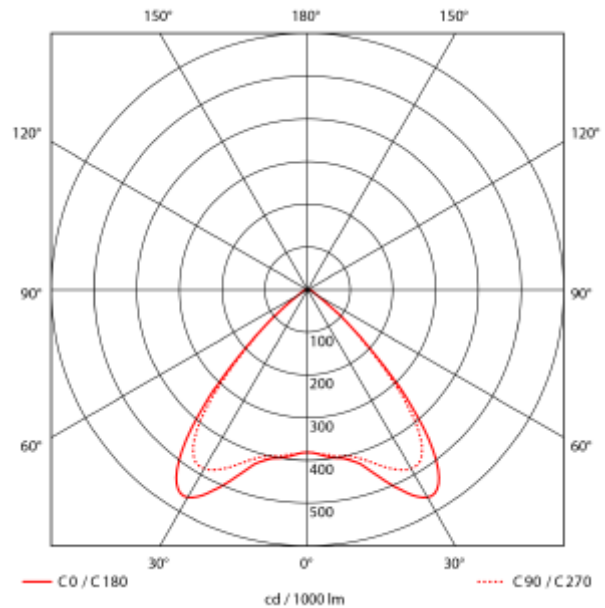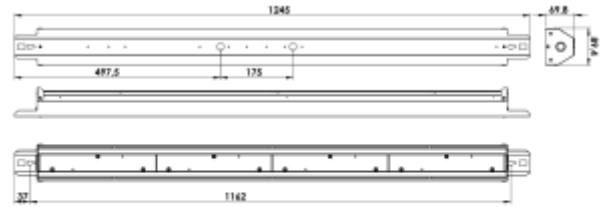

| SPECIFICATIONS | |
|--------------------------|------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 42W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 7166lm |
| Lumen LED (tc=25): | 7400lm |
| Beam Angle: | Wide |
| Dimming: | None |
| System Voltage [V]: | 230V 50Hz |
| Connection: | QuickConnect |
| Mounting: | Surface, Ceiling |
| Lifetime [h]: | L80B50: 100 000h |
| Lumen/W: | 170lm/W |
| UGR (<=): | 20 |
| MacAdam (SDCM): | 3 |
| Through-wiring (mm2): | 5x2,5 |
| Color: | Aluminium |
| Length [mm]: | 1245mm |
| Height [mm]: | 70mm |
| Width [mm]: | 90mm |
| Weight [kg]: | 4kg |

Bladeline Z is a highly efficient LED luminaire with up to 179lm/w. Due to fact that it may be installed surface mounted on the ceiling or on electrical tracks makes it highly flexible. Can be opened without using tools and it has the electric connectors on quick fit clamps. The Bladeline Z is made from galvanized steel with medium or wide beam (75° and 90°) optic in 42W or 75W versions.