




## FDV SPEC SHEET

Silindir 60

Art. no: 1014060-40-2-p



Lighting Solutions

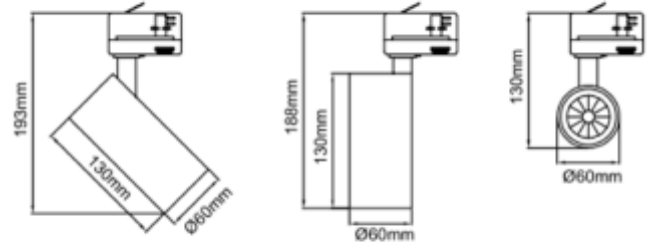

# Silindir 60



Art. no: 1014060-40-2-p

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1310
Lumen LED (tc=25):	1350
Beam Angle:	40°
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track

### ELECTRICAL DATA

Dimming:	Phase-Cut
System Power [W]:	15
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	43
Max load pr circuit - B16:	68
Max load pr circuit - C10:	72
Max load pr circuit - C16:	116
Inrush current I <sub>max</sub> [A]:	15
Inrush current time [µs]:	10
Current Output [mA]:	350
Voltage Forward Min [V]:	31,5
Voltage Forward Max [V]:	37,5



## FDV SPEC SHEET

Silindir 60

Art. no: 1014060-40-2-p



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Lifetime [h]:	L80B10: 50.000
Color:	Black
RAL:	RAL9005
Length [mm]:	188
Width [mm]:	60